




CARATTERISTICHE:
 Diffusori a flusso elicoidale
 con getti regolabili.

COSTRUZIONE:
 Acciaio verniciato bianco
 RAL 9010, deflettori in
 polipropilene nero RAL 9005

IMPIEGO:
 A soffitto, in mandata e
 ripresa (senza deflettori).
 Altezza di installazione:
 2,5-4,1 m

FISSAGGIO:
 Fissaggio con viti laterali o a
 mezzo vite centrale su ponte
 di montaggio.

ACCESSORI:
 Plenum in acciaio zincato
 standard o isolato, con o
 senza rete equalizzatrice,
 serranda di taratura e ponte
 di montaggio.

CHARACTERISTICS:
 Swirl diffusers with adjustable
 throws.

CONSTRUCTION:
 RAL 9010 white painted steel,
 deflection blades are made of
 polypropylene RAL 9005 black.

UTILIZATION:
 For ceiling installation and for
 air intake (without deflectors)
 and delivery.
 Installation height: 2,5-4,1 m.


FIXING:
 Fixing by using lateral screws
 or central screw on mounting
 bridge.

ACCESSORIES:
 Galvanized steel plenum,
 standard or insulated, with
 or without equalizer sheet,
 calibration damper and
 mounting bridge.

					
	D	D	BQE1QR	BQE1RR	BQE1QQ
mm	Ø	mm	A	A	A
310	308	305x305	31,42	35,51	36,88
400	398	395x395	46,44	51,90	53,29
500	498	495x495	62,83	71,04	72,40
600	598	595x595	73,77	81,96	83,32
625	623	620x620	80,59	90,16	92,89
800	798	795x795	133,88	150,27	152,99

Let op: bovenstaande prijzen zijn in € bruto, excl. 21% BTW; vraag Pairedirect voor een netto aanbieding!

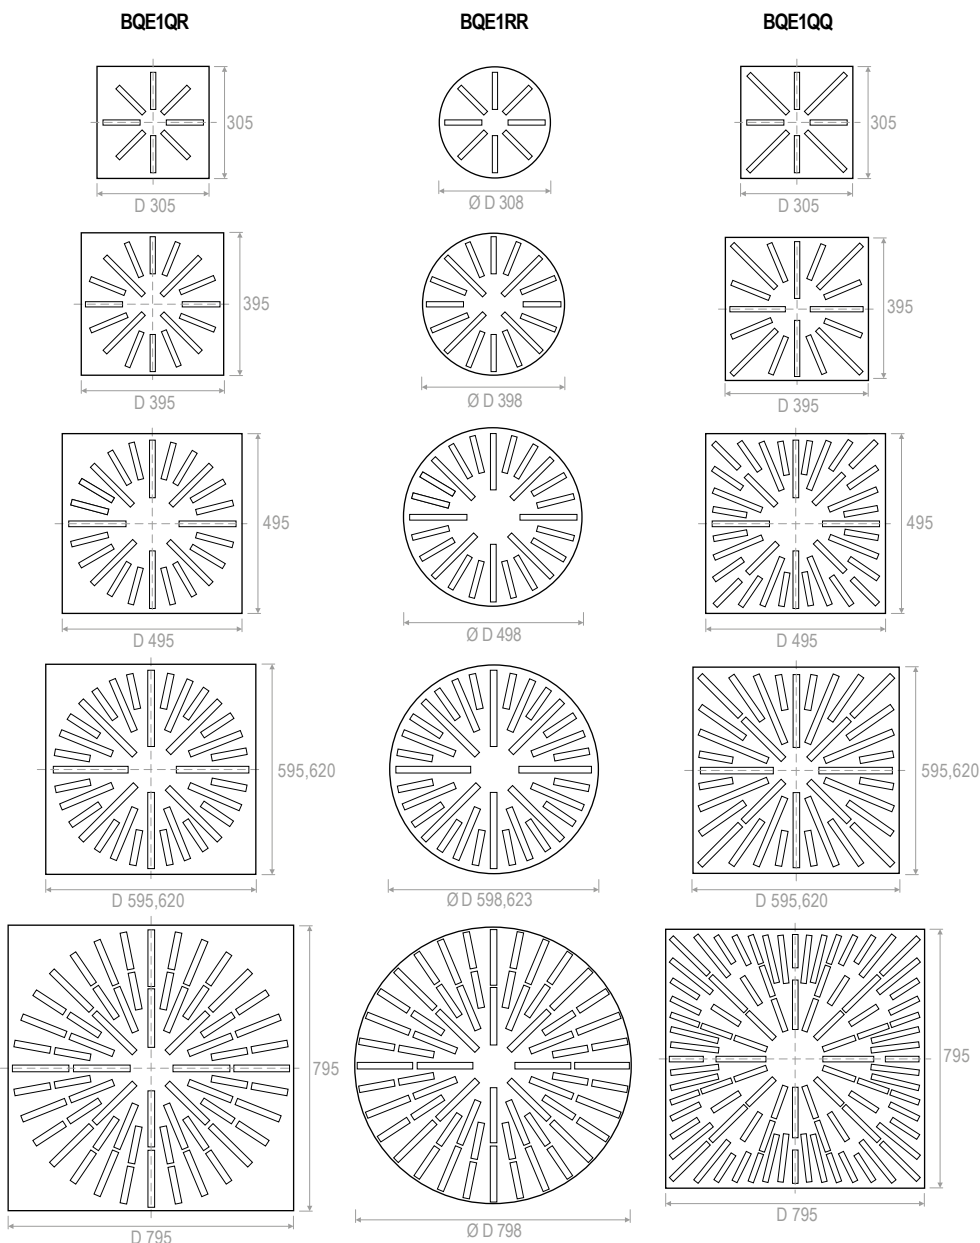DISEGNI - DRAWINGS




PREZZI - PRICES PLENUM BQE1 QR / BQE1 QQ

AxB	Cannotto Spigot	PQZ1	PQZ1	PQZ2	PQZ12	Serranda Damper	Equalizzatore Equalizer	Ponte di fissaggio Fixing bridge
mm	Ø mm	A	A	A	A	A	A	A
310	123	39,74	50,79	43,93	69,80	16,81	9,49	9,14
400	148	48,36	64,20	54,91	81,34	16,81	10,85	9,14
500	198	52,40	70,30	63,16	97,40	17,20	17,82	10,20
600	248	65,11	85,83	81,21	115,50	17,69	25,24	10,75
625	298	79,98	104,88	99,89	135,23	18,29	25,90	11,29
800	348	107,29	141,61	138,16	193,78	18,96	38,89	12,90

Let op: bovenstaande prijzen zijn in € bruto, excl. 21% BTW; vraag Pairedirect voor een netto aanbieding!

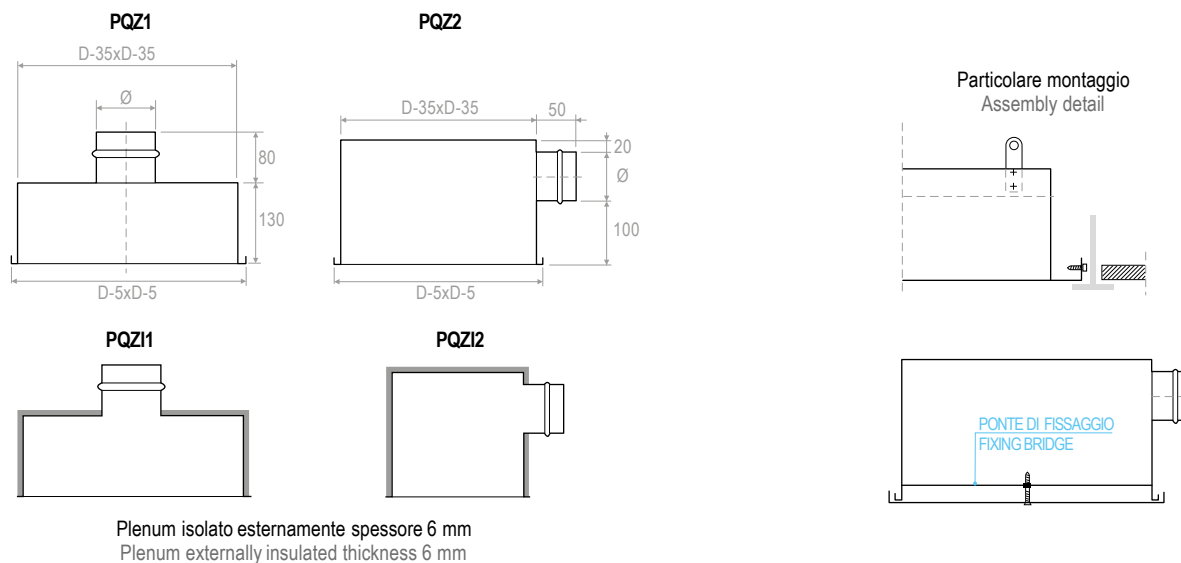DISEGNI - DRAWINGS



PREZZI - PRICES PLENUM BQE1 RR

	Plenum zincato - Galvanized plenum			PDCQ	PDCQI	Serranda Damper	Equalizzatore Equalizer	Ponte di fissaggio Fixing bridge
	AxA	ØD	ØE					
mm	mm	mm	mm	A	A	A	A	A
308	400	123	300	68,69	87,83	16,81	9,49	9,14
398	500	148	390	81,75	104,94	16,81	10,85	9,14
498	600	198	490	107,01	136,03	17,20	17,82	10,20
598	700	248	590	155,33	197,58	17,69	25,24	10,75
623	700	298	615	161,17	205,12	18,29	25,90	11,29
798	900	348	790	221,12	360,85	18,96	38,89	12,90

Let op: bovenstaande prijzen zijn in € bruto, excl. 21% BTW; vraag Pairedirect voor een netto aanbieding!

DISEGNI - DRAWINGS

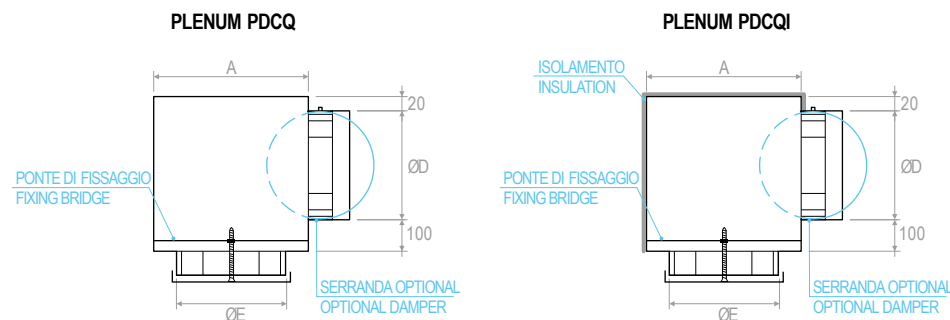


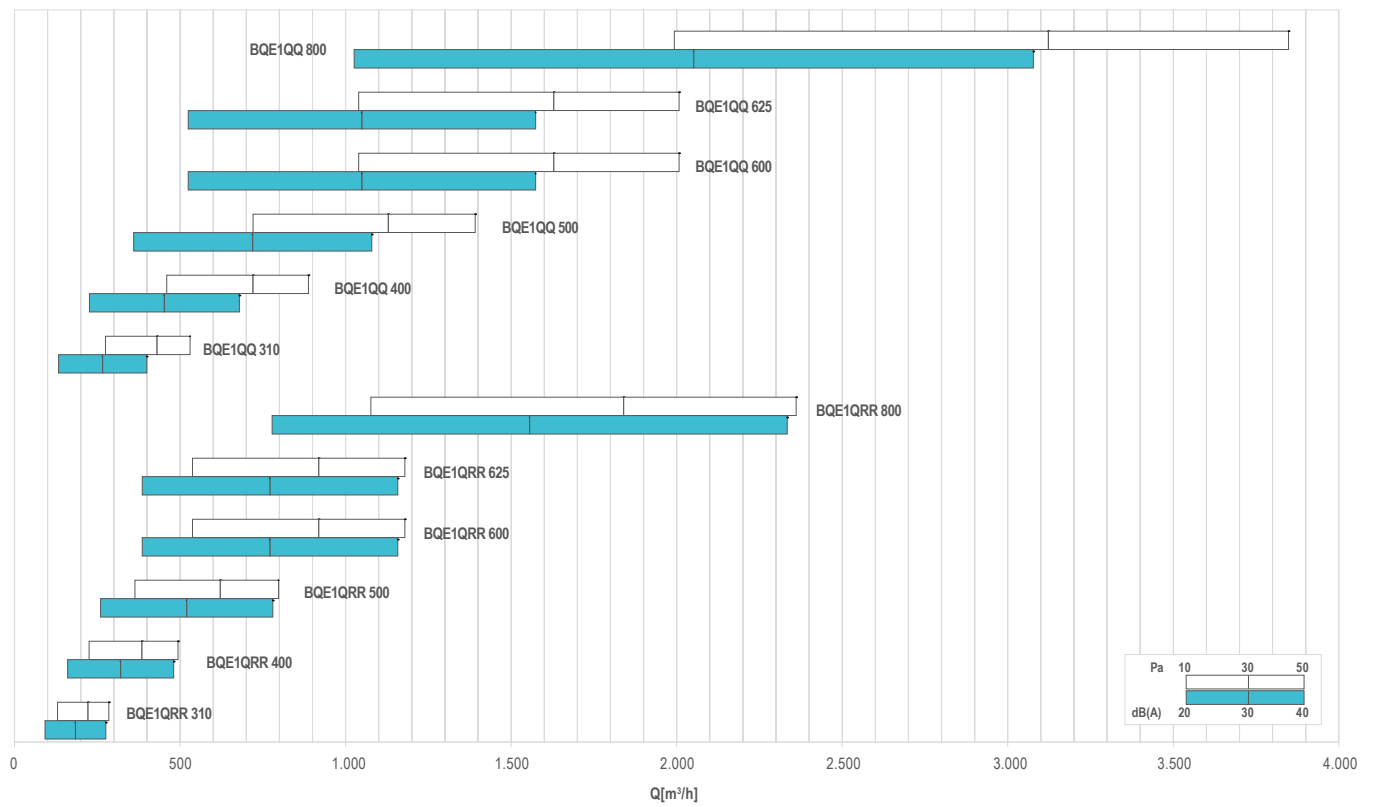
DIAGRAMMA SCELTA RAPIDA - QUICK SELECTION DIAGRAM


TABELLA DI SELEZIONE - SELECTION TABLE

Modello - Model	A_x [m ²]	Q [m ³ /h]		L_{WA} [dB(A)]		$X_{(0,20)}$ [m]		Dp_t [Pa]	
		min	max	min	max	min	max	min	max
BQE1QRR 310	0,0128	130	290	24	41	1,3	2,9	10	50
BQE1QRR 400	0,0223	230	490	24	41	1,8	3,8	10	50
BQE1QRR 500	0,0361	360	800	24	41	2,2	4,8	10	50
BQE1QRR 600	0,0536	540	1180	24	41	2,7	5,8	10	50
BQE1QRR 625	0,0536	540	1180	24	41	2,7	5,8	10	50
BQE1QRR 825	0,1081	1080	2360	24	40	3,8	8,2	10	50
BQE1QQ 310	0,0185	270	530	30	50	2,3	4,5	10	50
BQE1QQ 400	0,0315	460	890	30	49	3,0	5,7	10	50
BQE1QQ 500	0,0500	720	1390	30	49	3,7	7,1	10	50
BQE1QQ 600	0,0729	1040	2010	30	48	4,4	8,5	10	50
BQE1QQ 625	0,0729	1040	2010	30	48	4,4	8,5	10	50
BQE1QQ 800	0,1425	1990	3850	29	48	6,0	11,7	10	50