

**CARATTERISTICHE:**

Diffusori a flusso elicoidale con getti regolabili.

COSTRUZIONE:

Acciaio verniciato bianco RAL 9010, deflettori in polipropilene nero RAL 9005.

IMPIEGO:

A soffitto, in mandata e ripresa (senza deflettori). Altezza di installazione: 2,5-4,1 m.

FISSAGGIO:

Fissaggio con viti laterali o a mezzo vite centrale su ponte di montaggio.

ACCESSORI:

Plenum in acciaio zincato standard o isolato, con o senza rete equalizzatrice, serranda di taratura e ponte di montaggio.

CHARACTERISTICS:

Swirl diffusers with adjustable throws.

CONSTRUCTION:

RAL 9010 white painted steel, deflection blades are made of polypropylene RAL 9005 black.

UTILIZATION:

For ceiling installation and for air intake (without deflectors) and delivery. Installation height: 2,5-4,1 m.

FIXING:



Fixing by using lateral screws or central screw on mounting bridge.

ACCESSORIES:

Galvanized steel plenum, standard or insulated, with or without equalizer sheet, calibration damper and mounting bridge.

				
	D	D	BQE3Q	BQE3R
mm	Ø	mm	A	A
300x8	298	295x295	31,42	35,51
400x16	398	395x395	43,72	50,54
500x16	498	495x495	54,65	61,47
600x16	598	595x595	56,01	62,83
625x16	623	620x620	69,67	77,86
500x24	498	495x495	62,83	71,04
600x24	598	595x595	65,57	72,40
625x24	623	620x620	76,50	86,06
600x48	598	595x595	80,60	91,52
625x54	623	620x620	92,89	105,19
800x72	798	795x795	137,97	155,73
825x72	823	820x820	140,70	158,45


Let op: bovenstaande prijzen zijn in € bruto, excl. 21% BTW; vraag Pairdirect voor een netto aanbieding!

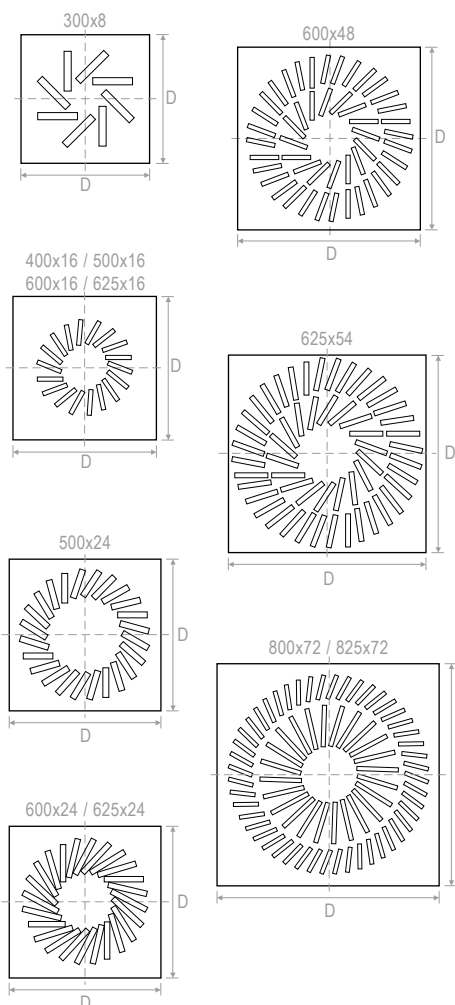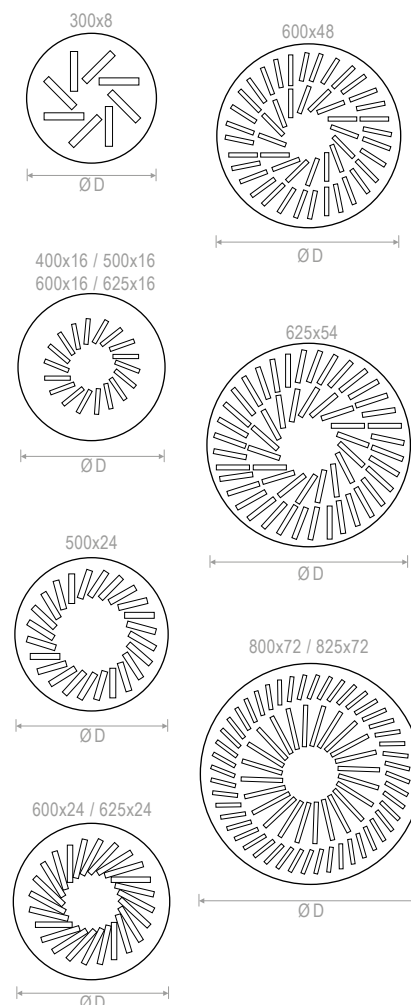DISEGNI - DRAWINGS**BQE3Q****BQE3R**

								
AxB	Cannotto Spigot	PQZ1	PQZ1	PQZ2	PQZ12	Serranda Damper	Equalizzatore Equalizer	Ponte di fissaggio Fixing bridge
mm	Ø mm	A	A	A	A	A	A	A
300	123	39,74	50,79	43,93	69,80	16,81	9,49	9,14
400	148	48,36	64,20	54,91	81,34	16,81	10,85	9,14
500	198	52,40	70,30	63,16	97,40	17,20	17,82	10,20
600	248	65,11	85,83	81,21	115,50	17,69	25,24	10,75
625	298	79,98	104,88	99,89	135,23	18,29	25,90	11,29
800	348	107,29	141,61	138,16	193,78	18,96	38,89	12,90
825	348	107,29	141,61	138,16	193,78	18,96	39,78	12,90

Let op: bovenstaande prijzen zijn in € bruto, excl. 21% BTW; vraag Pairedirect voor een netto aanbieding!

DISEGNI - DRAWINGS

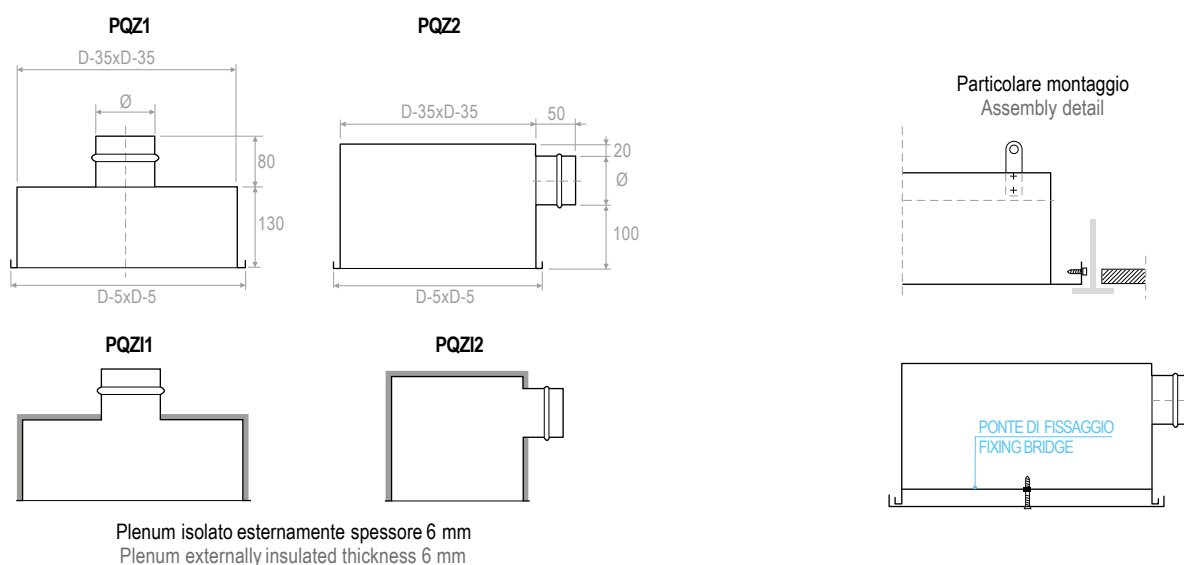

PREZZI - PRICES PLENUM BQE3R

	Plenum zincato - Galvanized plenum			PDCQ	PDCQI	Serranda Damper	Equalizzatore Equalizer	Ponte di fissaggio Fixing bridge
	AxA	Ø D	Ø E					
mm	mm	mm	mm	A	A	A	A	A
298	400	123	290	68,49	87,83	16,81	9,49	9,14
398	500	148	390	81,75	104,94	16,81	10,85	9,14
498	600	198	490	107,01	136,03	17,20	17,82	10,20
598	700	248	590	155,33	197,58	17,69	25,24	10,75
623	700	298	615	161,17	205,12	18,29	25,90	11,29
798	900	348	790	221,12	360,85	18,96	38,89	12,90
823	900	348	815	234,42	388,24	18,96	39,78	12,90

Let op: bovenstaande prijzen zijn in € bruto, excl. 21% BTW; vraag Pairedirect voor een netto aanbieding!

DISEGNI - DRAWINGS

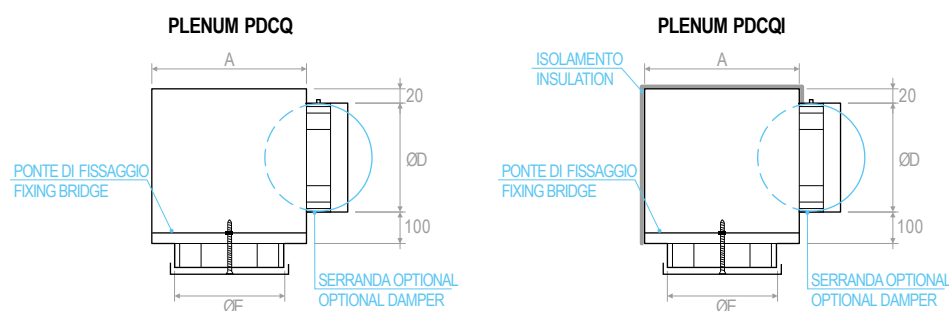


DIAGRAMMA SCELTA RAPIDA - QUICK SELECTION DIAGRAM

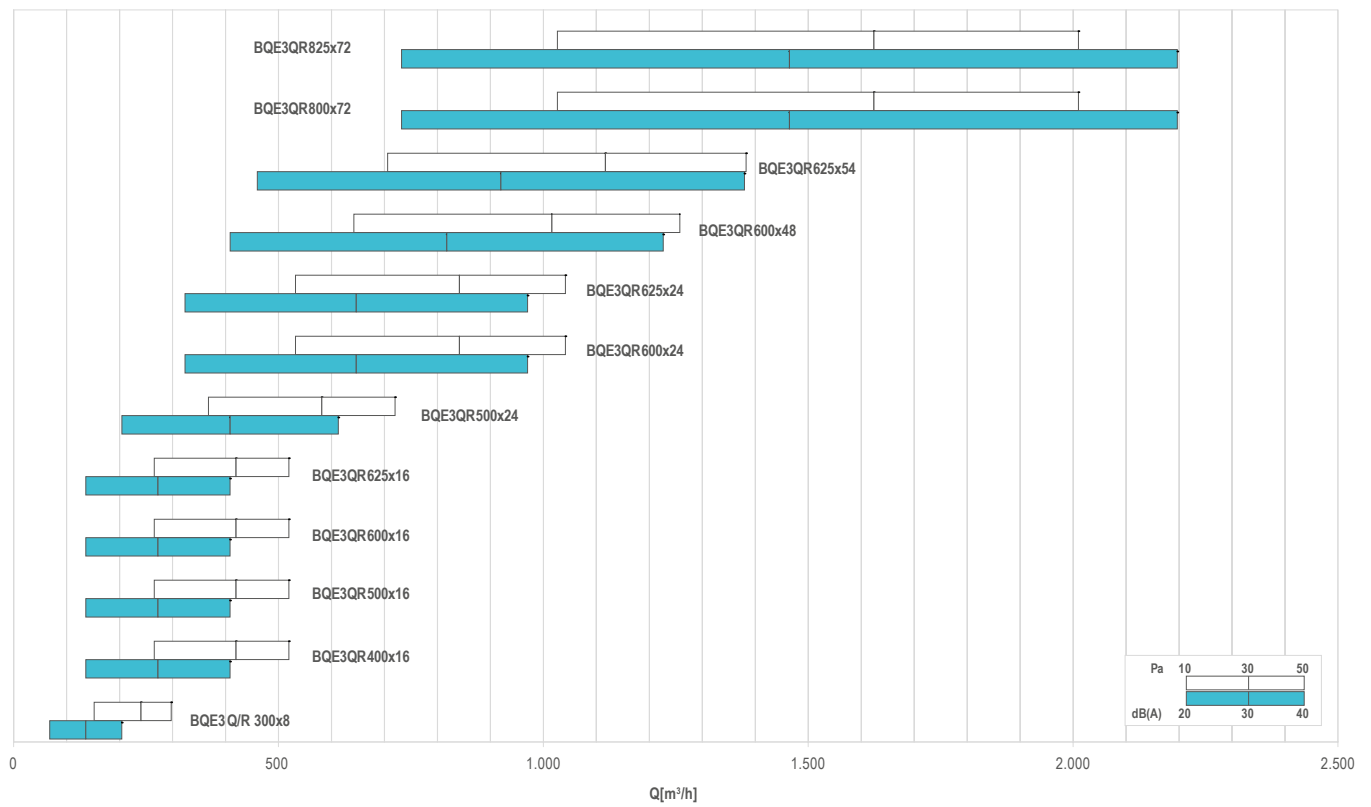


TABELLA DI SELEZIONE - SELECTION TABLE

Modello - Model	A_x [m ²]	Q [m ³ /h]		L_{WA} [dB(A)]		$X_{(0,20)}$ [m]		Dp_t [Pa]	
		min	max	min	max	min	max	min	max
BQE3QR300x8	0,0095	150	300	32	54	1,8	3,5	10	50
BQE3QR400x16	0,0189	270	520	30	48	2,2	4,3	10	50
BQE3QR500x16	0,0189	270	520	30	48	2,2	4,3	10	50
BQE3QR600x16	0,0189	270	520	30	48	2,2	4,3	10	50
BQE3QR625x16	0,0189	270	520	30	48	2,2	4,3	10	50
BQE3QR500x24	0,0284	370	720	28	45	2,5	4,9	10	50
BQE3QR600x24	0,0449	530	1040	26	42	2,9	5,6	10	50
BQE3QR625x24	0,0449	530	1040	26	42	2,9	5,6	10	50
BQE3QR600x48	0,0568	640	1260	26	41	3,1	6,1	10	50
BQE3QR625x54	0,0639	710	1380	25	40	3,2	6,3	10	50
BQE3QR800x72	0,1017	1030	2010	24	37	3,7	7,2	10	50
BQE3QR825x72	0,1017	1030	2010	24	37	3,7	7,2	10	50