



			
	BQS	BQSC	
mm	A	A	PEZZI - PIECES
600	61,01	74,27	5
625	66,31	79,57	5

Let op: bovenstaande prijzen zijn in € bruto, excl. 21% BTW; vraag Pairedirect voor een netto aanbieding!

DISEGNI - DRAWINGS


CARATTERISTICHE:
Diffusori a flusso elicoidale.

COSTRUZIONE:
Acciaio verniciato bianco
RAL 9010.

IMPIEGO:
A soffitto, in mandata e ripresa.
Altezza di installazione:
BQS = 2,6-4,0 m.

FISSAGGIO:
Fissaggio con viti laterali o a mezzo vite centrale su ponte di montaggio.

ACCESSORI:
Plenum in acciaio zincato standard o isolato, con o senza rete equalizzatrice, serranda di taratura e ponte di montaggio.

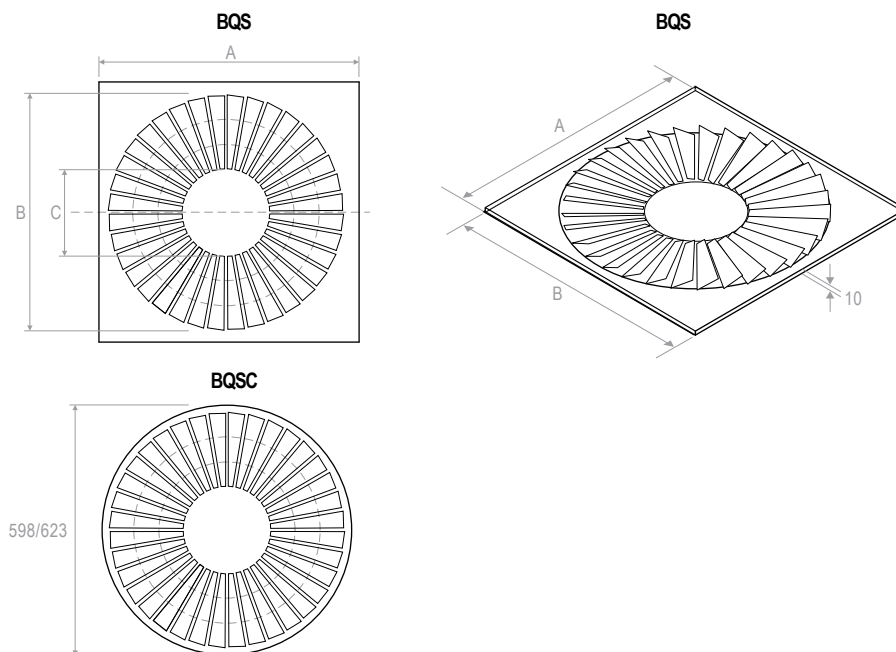

CHARACTERISTICS:
Swirl diffusers.

CONSTRUCTION:
RAL 9010 white painted steel.

UTILIZATION:
For ceiling installation and for air intake and delivery.
Installation height:
BQS = 2,6-4,0 m.

FIXING:
Fixing by using lateral screws or central screw on mounting bridge.


ACCESSORIES:
Galvanized steel plenum, standard or insulated, with or without equalizer sheet, calibration damper and mounting bridge.

PREZZI - PRICES PLENUM

	Cannotto Spigot							
AxB		PQZ1	PQZ11	PQZ2	PQZ12	Serranda Damper	Equalizzatore Equalizer	Ponte di fissaggio Fixing bridge
mm	Ø mm	A	A	A	A	A	A	A
600	248	65,11	85,83	81,21	115,50	17,69	25,24	10,75
625	298	79,98	104,88	99,89	135,23	18,29	25,90	11,29

Let op: bovenstaande prijzen zijn in € bruto, excl. 21% BTW; vraag Pairedirect voor een netto aanbieding!

DISEGNI - DRAWINGS

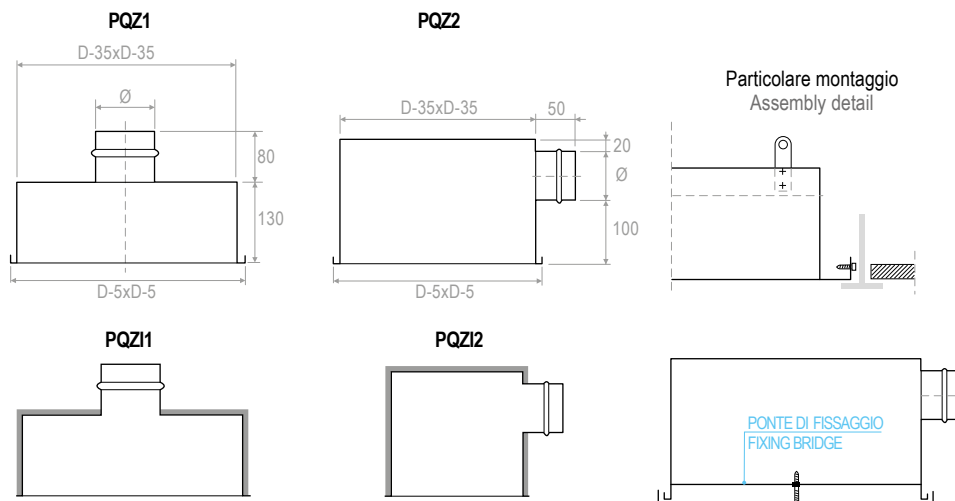

Plenum isolato esternamente spessore 6 mm
Plenum externally insulated thickness 6 mm

	Plenum zincato - Galvanized plenum			PDCQ	PDCQI	Serranda Damper	Equalizzatore Equalizer	Ponte di fissaggio Fixing bridge
	AxA	ØD	ØE					
mm	mm	mm	mm	A	A	A	A	A
598	700	248	590	155,33	197,58	17,69	25,24	10,75
623	700	298	615	161,17	205,12	18,29	25,90	11,29

Let op: bovenstaande prijzen zijn in € bruto, excl. 21% BTW; vraag Pairdirect voor een netto aanbieding!

DISEGNI - DRAWINGS

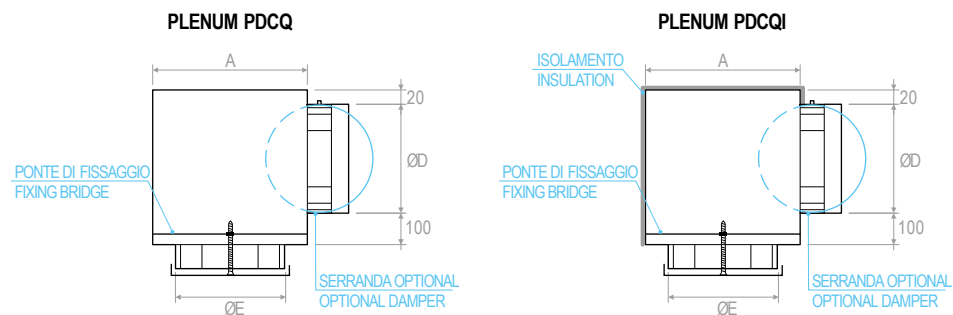


DIAGRAMMA SCELTA RAPIDA - QUICK SELECTION DIAGRAM

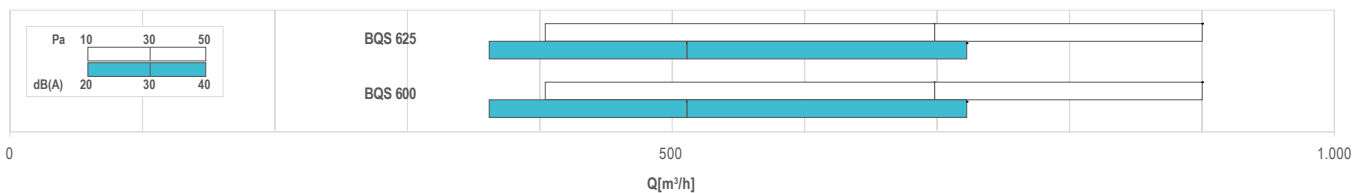


TABELLA DI SELEZIONE - SELECTION TABLE

Modello - Model	A _x [m²]	Q [m³/h]		L _{WA} [dB(A)]		X _(0,20) [m]		Dp _t [Pa]	
		min	max	min	max	min	max	min	max
BQS 600	0,0368	400	900	23	46	3,3	7,4	10	50
BQS 625	0,0368	400	900	23	46	3,3	7,4	10	50