



CHARACTERISTICS:
 Linear slot diffusers with aifoil section rotating deflector for high airflow.

CONSTRUCTION:
 Anodized extruded aluminium, deflector made of RAL 9005 black polypropylene.



UTILIZATION:
 For ceiling installation and for air intake and delivery.
 Installation height: 2,6-4,0 m.

FIXING:

- By inner mounting mobile bracket.
- By springs inside the plenum.

ACCESSORIES:

- Galvanized steel connecting plenum with insulation.
- Deflector RAL 9003.

					
FERITOIE - SLOTS	LUNGHEZZA-LENGTH	DLPCB10	DLPCB20	PDLCB	PDLCBI
N.	mm*	A	A	A	A
1	800	40,75	48,79	58,72	75,07
	1000	46,29	55,44	63,68	82,02
	1500	63,87	76,53	76,91	100,17
	2000	83,31	99,80	95,74	127,21
2	800	64,15	79,23	61,81	79,31
	1000	72,89	90,03	68,37	87,94
	1500	100,58	124,23	82,85	107,78
	2000	131,21	162,06	103,01	136,61
3	800	80,81	100,61	64,90	83,44
	1000	91,84	114,33	72,23	93,09
	1500	126,73	157,76	88,00	114,66
	2000	165,30	205,78	109,51	145,12
4	800	102,64	129,06	69,27	88,91
	1000	116,63	146,65	75,33	97,34
	1500	160,94	202,38	92,07	120,27
	2000	209,93	263,99	114,47	152,06



Let op: bovenstaande prijzen zijn in € bruto, excl. 21% BTW; vraag Pairedirect voor een netto aanbieding!

*N.B.: le lunghezze riportate sono da intendere passaggio aria - The lengths are actual neck sizes




VERNICIATURA - PAINTING:
 Colori RAL 9010 - 9016: + 15% - Color RAL 9010 - 9016: + 15%
 Altri colori: prezzi a richiesta - Different colors: prices on request

MODELLI - MODELS:
DLPCB10: Diffusore standard (1) - Standard diffuser (without sliding control damper and deflector) (1)
DLPCB20: Diffusore con deflettore (1) + (2) - Diffuser with deflector (1) + (2)


DISEGNI - DRAWINGS




N. feritoie N. slots	Lunghezza mm Length mm	Ø collarino est. N. collarini Ø spigot N. spitos	A mm	B mm	S mm	NR. CM Molle Spring	NR. CVL Cavalletti Mounting brackets
1	800	98-1	51	73	56	2	2
	1000	98-1				2	2
	1500	98-2				2	2
	2000	98-3				3	2
2	800	148-1	102	124	107	4	2
	1000	148-2				4	2
	1500	148-3				4	2
	2000	148-4				6	2
3	800	198-1	153	175	158	4	2
	1000	198-2				4	2
	1500	198-3				6	2
	2000	198-4				6	3
4	800	198-2	204	226	209	4	2
	1000	198-2				4	2
	1500	198-3				6	2
	2000	198-4				6	3

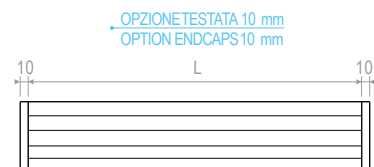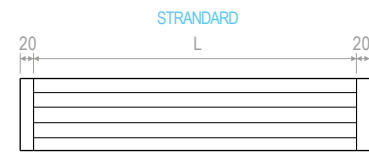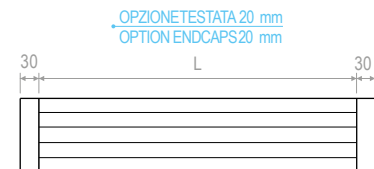




DISEGNI - DRAWINGS

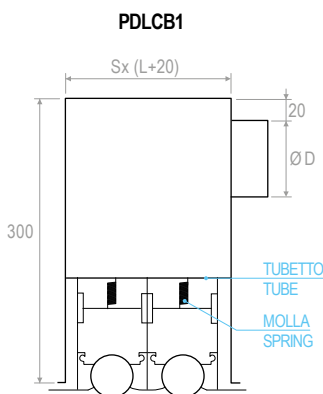


Fissaggio al plenum con molle CM
Fixing the plenum by springs CM

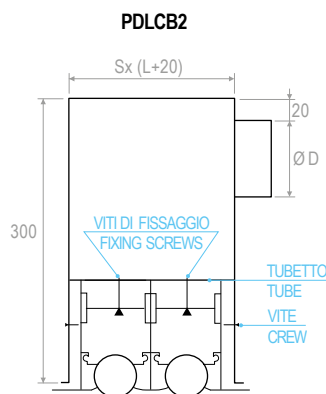

Fissaggio al plenum con staffe
CVL-CB cavalletti
Fixing the plenum by inner
mounting brackets CVL-CN

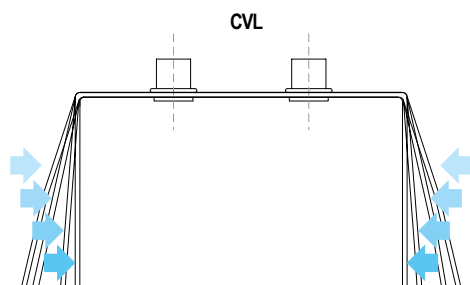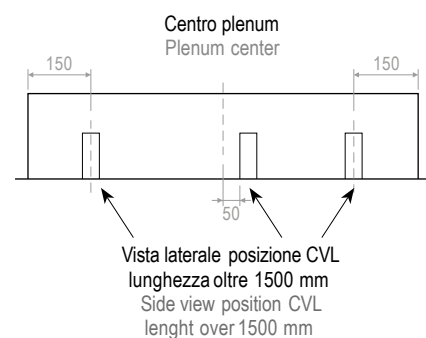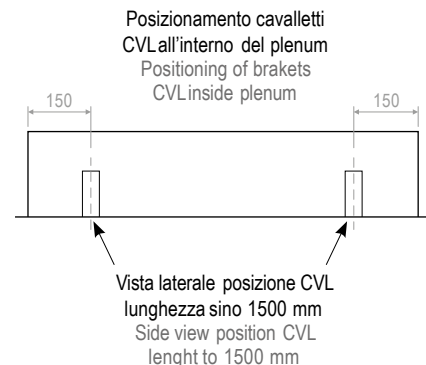

Modifica configurazione CVL da PDL3 a PDL2 con pressione delle dita
Configuration change CVL to PDL3 to PDL2 with finger pressure

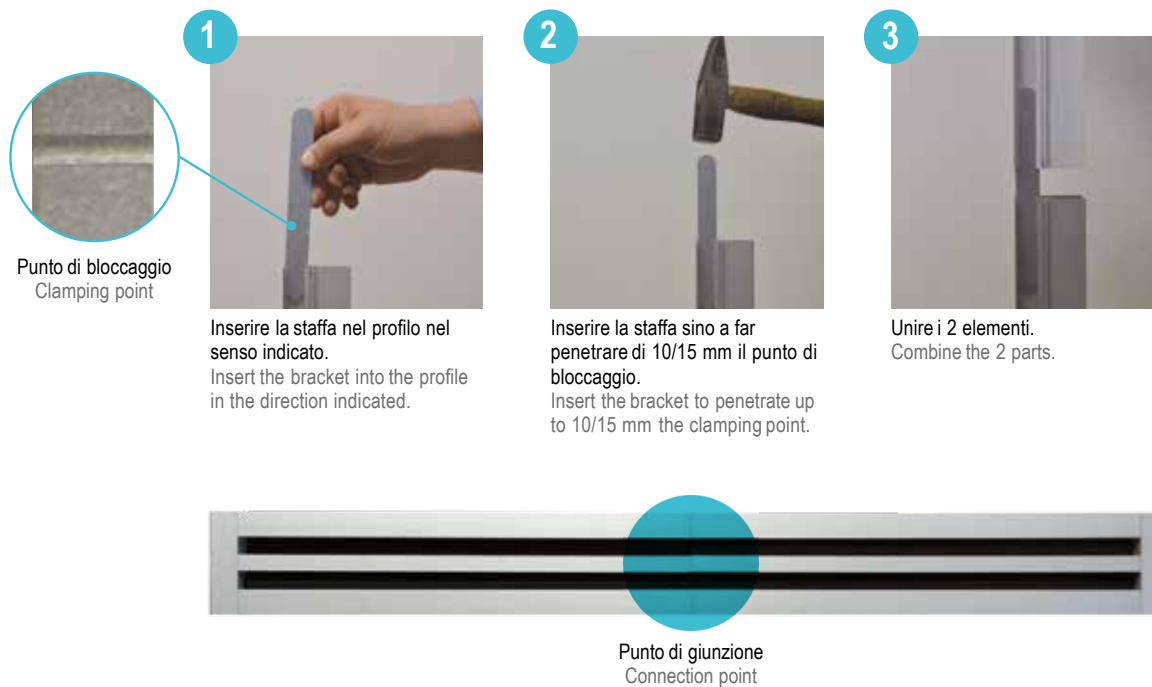

ACCESSORI - ACCESSORIES

		A
CVLCB 1-4 Feritoie - 1-4 Slots		6,05
CM Molla - Spring		0,79
CG Gancio - Hook		1,99
CCKITCONTDLPCB Kit Continuità (2 pezzi) Kit continuity (2 pieces)		2,65

TABELLA DI SELEZIONE - SELECTION TABLE

Modello - Model	A_v [m ²]	Q [m ³ /h]		L_{WA} [dB(A)]		$X_{(0,25)}$ [m]		Dp_t^* [Pa]	
		min	max	min	max	min	max	min	max
DLPCB1 1000	0,013	80	220	-	43	3,0	7,4	10	50
DLPCB2 1000	0,026	190	420	24	45	4,1	9,1	10	50
DLPCB3 1000	0,039	270	600	25	47	4,4	10,1	10	50
DLPCB4 1000	0,052	340	760	25	47	4,8	10,7	10	50

*Senza equalizzatore e serranda completamente aperta - Without equalizer and calibration damper completely open