






CHARACTERISTICS:
Diffusers with adjustable nozzles arranged on a rectangular panel.

CONSTRUCTION:
Material: steel plate, aluminium frame, white nylon nozzles.
Finish: White RAL 9010.


FIXING:
By using screws (Standard), Clips.

- ACCESSORIES:**
- Galvanized steel plenum, standard or insulated.
 - Calibration damper made of galvanized steel and fins with opposite movement.
 - Mounting counterframes made of galvanized steel sheet.





								
BxH	Nr ugelli Nr nozzles	GURG	SC	CT	PBZ1	PBZ11	PBZ2	PBZ12
mm		A	A	A	A	A	A	A
275x150	2	58,39	13,22	7,02	29,86	43,41	31,51	45,98
275x275	4	90,85	20,23	9,26	33,42	48,61	37,19	54,45
275x400	6	123,31	24,90	10,82	47,42	64,29	51,83	71,10
400x150	3	75,57	15,55	7,71	31,44	45,85	33,47	48,98
400x275	6	123,31	24,90	10,82	47,42	63,51	51,83	71,10
400x400	9	171,04	27,87	12,34	50,27	68,37	57,39	79,37
525x150	4	92,76	20,23	10,10	42,23	58,75	39,30	58,01
525x275	8	161,11	25,81	13,07	58,98	78,38	59,35	82,72
525x400	12	224,13	35,79	15,44	70,71	97,87	74,57	107,60
650x150	5	115,29	22,94	10,82	54,95	72,87	52,64	73,10
650x275	10	193,58	32,69	14,23	60,96	81,42	64,81	91,15
650x400	15	271,87	39,67	16,49	72,94	101,31	80,80	117,24
775x150	6	132,48	25,65	11,51	56,52	75,31	54,84	76,50
775x275	12	226,04	35,79	15,44	71,28	99,09	76,28	110,57
775x400	18	319,60	43,57	17,56	83,50	113,53	92,77	131,61
900x150	7	155,00	30,59	13,07	67,61	88,52	62,52	88,24
900x275	14	263,85	42,79	17,56	75,83	105,80	86,49	126,03
900x400	21	372,69	51,34	19,92	99,10	135,00	114,80	163,05
1025x150	8	172,18	34,62	16,13	70,77	93,39	67,46	95,83
1025x275	16	296,30	49,78	19,10	88,12	117,71	101,56	142,26
1025x400	24	420,42	61,45	21,33	103,54	141,89	122,55	175,02

Let op: bovenstaande prijzen zijn in € bruto, excl. 21% BTW; vraag Pairedirect voor een netto aanbieding!

DISEGNI - DRAWINGS

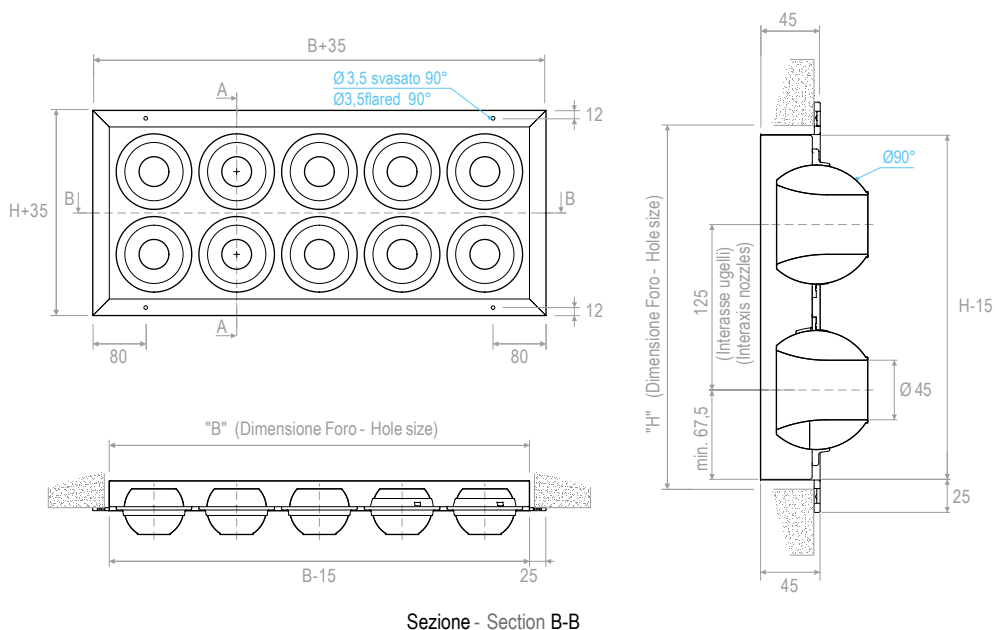

Modello Model	Numero ugelli Number nozzles	Q [m³/h]		L _{WA} [dB(A)]		X _(0,25) -Y _(0,25) [m]		Dp _i [Pa]	
		min	max	min	max	min	max	min	max
275x150	2	30	110	28	44	4,5	10,5	10	65
275x275	4	60	230	30	47	5,4	19,6	10	65
275x400	6	90	340	33	54	6	22,5	10	65
400x150	3	40	170	28	44	4,5	10,5	10	65
400x275	6	90	340	30	47	5,4	19,6	10	65
400x400	9	130	510	33	54	6	22,5	10	65
525x150	4	60	230	28	44	4,5	10,5	10	65
525x275	8	110	460	30	47	5,4	19,6	10	65
525x400	12	170	690	33	54	6	22,5	10	65
650x150	5	70	230	28	44	4,5	10,5	10	65
650x275	10	140	570	30	47	5,4	19,6	10	65
650x400	15	210	860	33	54	6	22,5	10	65
775x150	6	90	340	28	44	4,5	10,5	10	65
775x275	12	170	690	30	47	5,4	19,6	10	65
775x400	18	260	1030	33	54	6	22,5	10	65
900x150	7	100	400	28	44	4,5	10,5	10	65
900x275	14	200	800	30	47	5,4	19,6	10	65
900x400	21	300	1200	33	54	6	22,5	10	65
1025x150	8	110	460	28	44	4,5	10,5	10	65
1025x275	16	230	920	30	47	5,4	19,6	10	65
1025x400	24	340	1370	33	54	6	22,5	10	65



Plenum isolato esternamente spessore 6 mm
Plenum externally insulated thickness 6 mm