



**CHARACTERISTICS:**  
 Wall-mounted overpressure  
 expulsion/aspiration grille  
 50 mm pitch.

**CONSTRUCTION:**  
 Anodized aluminium frame  
 and blades.

**UTILIZATION:**  
 For wall installation and for  
 air intake or delivery.

**FIXING:**  
 Fixing by using clips or frontal  
 screws on demand.

**ACCESSORIES:**

- Calibration damper made of galvanized steel and fins with opposite movement.
- Mounting counterframes made of galvanized steel sheet.
- Bird screen.

| BxH mm | Base B<br>200 mm | Base B<br>300 mm | Base B<br>400 mm | Base B<br>500 mm | Base B<br>600 mm | Base B<br>700 mm | Base B<br>800 mm | Base B<br>1000 mm |
|--------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|-------------------|
|        | A                | A                | A                | A                | A                | A                | A                | A                 |
| 200    | 31,10            | 34,80            | 37,77            | 41,49            | 45,18            | 46,69            | 50,39            | 55,57             |
| 300    | 37,03            | 40,75            | 45,18            | 49,62            | 52,59            | 57,04            | 61,48            | 69,64             |
| 400    | 42,23            | 46,69            | 52,59            | 57,77            | 61,48            | 66,66            | 71,12            | 82,23             |
| 500    | 47,39            | 52,59            | 58,53            | 65,93            | 70,37            | 77,03            | 82,23            | 95,56             |
| 600    | 53,34            | 58,53            | 66,66            | 73,35            | 79,25            | 85,94            | 93,33            | 106,66            |
| 800    | 62,97            | 71,82            | 79,25            | 89,63            | 96,31            | 105,19           | 114,10           | 131,87            |
| 1000   | 73,35            | 83,71            | 93,33            | 104,43           | 112,70           | 123,71           | 134,83           | 160,74            |

Let op: bovenstaande prijzen zijn in € bruto, excl. 21% BTW; vraag Pairedirect voor een netto aanbieding!

Su richiesta rete antivoltile: +25% - On request Overpressuredamper with bird mesh: + 25%

**VERNICIATURA - PAINTING:**

Colori RAL 9010 - 9016: + 15% - Color RAL 9010 - 9016: + 15%

Altri colori: prezzi a richiesta - Different colors: prices on request

**DESCRIZIONI - DESCRIPTIONS:**

**SSA:** Griglia di aspirazione (alette passo 50mm) - Intake grille (blades 50 mm pitch)



**SSE:** Griglia di espulsione (alette passo 50 mm) - Outlet grille (blades 50 mm pitch)

**ACCESSORI - ACCESSORIES:**

**CT:** Controtelaio di fissaggio in lamiera d'acciaio zincata - Counterframes in galvanised steel sheet profile section

Serranda di sovrappressione con rete antivoltile - Overpressure damper with bird mesh

**DISEGNI - DRAWINGS**

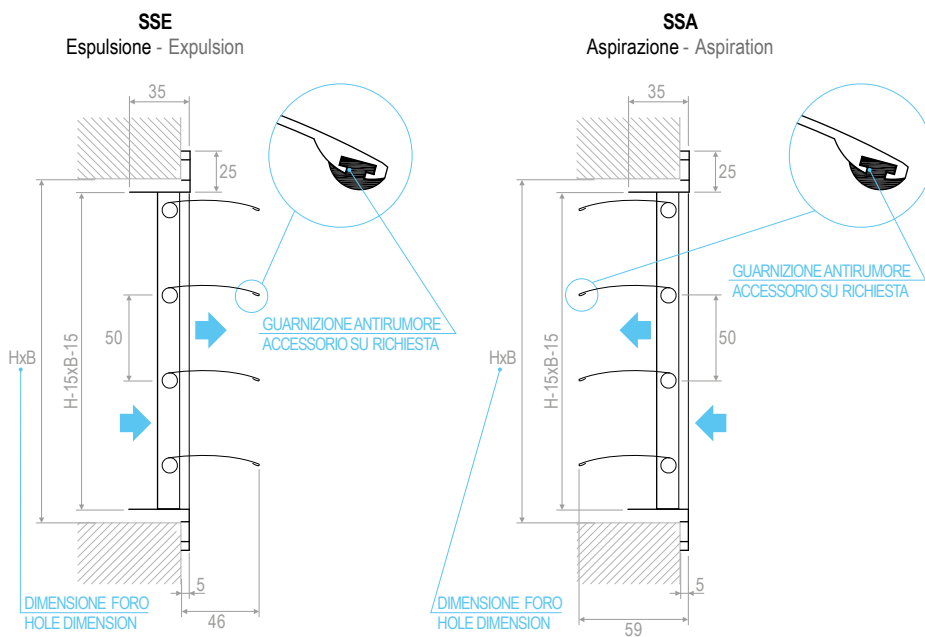

Battute di serie come da foto  
 Series swabs as picture

Guarnizione continua antirumore prezzo + 15 %  
 Aphonic continuous seal price + 15 %

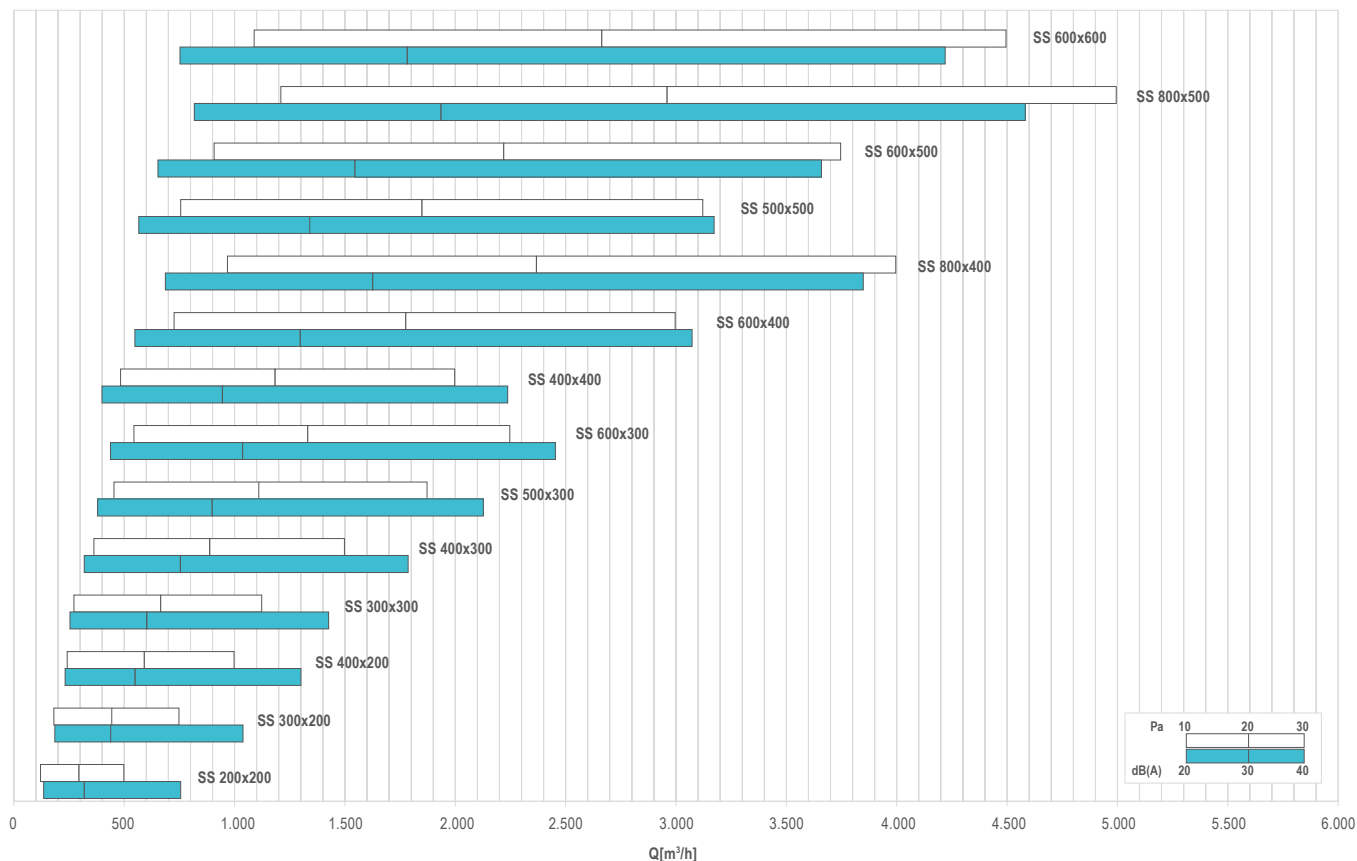


TABELLA DI SELEZIONE - SELECTION TABLE

| Modello - Model | $A_x$ [ $m^2$ ] | $Q$ [ $m^3/h$ ] |      | $L_{wa}$ [dB(A)] |     | $Dp$ [Pa] |     |
|-----------------|-----------------|-----------------|------|------------------|-----|-----------|-----|
|                 |                 | min             | max  | min              | max | min       | max |
| SS 200x200      | 0,0363          | 50              | 300  | -                | 29  | 5         | 20  |
| SS 400x200      | 0,0727          | 100             | 590  | -                | 31  | 5         | 20  |
| SS 600x200      | 0,1091          | 150             | 890  | -                | 32  | 5         | 20  |
| SS 800x200      | 0,1454          | 200             | 1180 | -                | 33  | 5         | 20  |
| SS 1000x200     | 0,1818          | 250             | 1480 | -                | 33  | 5         | 20  |
| SS 200x400      | 0,0727          | 100             | 590  | -                | 31  | 5         | 20  |
| SS 400x400      | 0,1454          | 200             | 1180 | -                | 33  | 5         | 20  |
| SS 600x400      | 0,2182          | 300             | 1780 | -                | 34  | 5         | 20  |
| SS 800x400      | 0,2909          | 400             | 2370 | -                | 34  | 5         | 20  |
| SS 1000x400     | 0,3636          | 490             | 2960 | -                | 35  | 5         | 20  |
| SS 200x600      | 0,1091          | 150             | 890  | -                | 32  | 5         | 20  |
| SS 400x600      | 0,2182          | 300             | 1780 | -                | 34  | 5         | 20  |
| SS 600x600      | 0,3273          | 450             | 2660 | -                | 35  | 5         | 20  |
| SS 800x600      | 0,4364          | 590             | 3550 | -                | 35  | 5         | 20  |
| SS 1000x600     | 0,5455          | 740             | 4440 | -                | 36  | 5         | 20  |
| SS 200x800      | 0,1454          | 200             | 1180 | -                | 33  | 5         | 20  |
| SS 400x800      | 0,2909          | 400             | 2370 | -                | 34  | 5         | 20  |
| SS 600x800      | 0,4364          | 590             | 3550 | -                | 35  | 5         | 20  |
| SS 800x800      | 0,5818          | 790             | 4740 | -                | 36  | 5         | 20  |
| SS 1000x800     | 0,7273          | 990             | 5920 | -                | 37  | 5         | 20  |
| SS 200x1000     | 0,1818          | 250             | 1480 | -                | 33  | 5         | 20  |
| SS 400x1000     | 0,3636          | 490             | 2960 | -                | 35  | 5         | 20  |
| SS 600x1000     | 0,5455          | 740             | 4440 | -                | 36  | 5         | 20  |
| SS 800x1000     | 0,7273          | 990             | 5920 | -                | 37  | 5         | 20  |
| SS 1000x1000    | 0,9091          | 1240            | 7400 | -                | 37  | 5         | 20  |