



CHARACTERISTICS:
Wall-mounted overpressure
expulsion/aspiration grille
100mm pitch.

CONSTRUCTION:
Anodized aluminium frame
and blades.

UTILIZATION:
For wall installation and for
air intake or delivery.

FIXING:
Fixing by using clips or frontal
screws on demand.

- ACCESSORIES:**
- Calibration damper made of galvanized steel and fins with opposite movement.
 - Mounting counterframes made of galvanized steel sheet.
 - Bird screen.

BxH mm	Base B 200 mm	Base B 300 mm	Base B 400 mm	Base B 500 mm	Base B 600 mm	Base B 700 mm	Base B 800 mm	Base B 1000 mm
	A	A	A	A	A	A	A	A
200	31,10	34,80	37,77	41,49	45,18	46,69	50,39	55,57
300	37,03	40,75	45,18	49,62	52,59	57,04	61,48	69,64
400	42,23	46,69	52,59	57,77	61,48	66,66	71,12	82,23
500	47,39	52,59	58,53	65,93	70,37	77,03	82,23	95,56
600	53,34	58,53	66,66	73,35	79,25	85,94	93,33	106,66
800	62,97	71,82	79,25	89,63	96,31	105,19	114,10	131,87
1000	73,35	83,71	93,33	104,43	112,70	123,71	134,83	160,74

Let op: bovenstaande prijzen zijn in € bruto, excl. 21% BTW; vraag Pairedirect voor een netto aanbieding!



Su richiesta rete antivolatile: +25% - On request Overpressuredamper with bird mesh: + 25%

VERNICIATURA - PAINTING:
Colori RAL9010 - 9016: + 15% - Color RAL9010 - 9016: + 15%
Altri colori: prezzi a richiesta - Different colors: prices on request

DESCRIZIONI - DESCRIPTIONS:
SSIA: Serranda di aspirazione (alette passo 100mm) - Intake damper (blades 100 mm pitch)
SSIE: Serranda di espulsione (alette passo 100 mm) - Outlet damper (blades 100 mm pitch)

ACCESSORI - ACCESSORIES:
CTP: Controtelaio di fissaggio in lamiera d'acciaio zincata - Counterframes in galvanised steel sheet profile section
Serranda di sovrappressione con rete antivolatile - Overpressure damper with bird mesh

DISEGNI - DRAWINGS

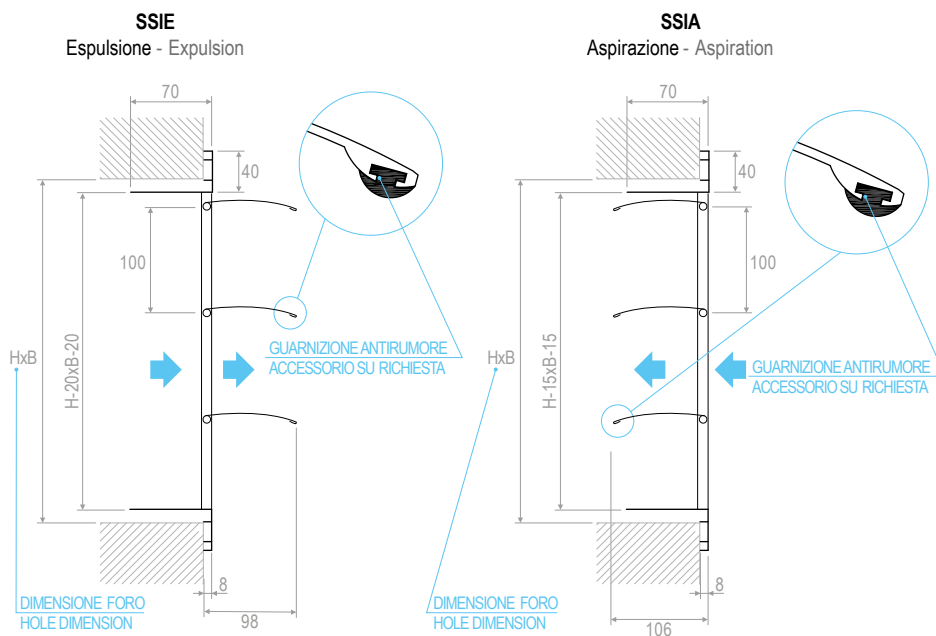

Battute di serie come da foto
Series swabs as picture

Guarnizione continua antirumore prezzo + 15 %
Aphonic continuous seal price + 15 %

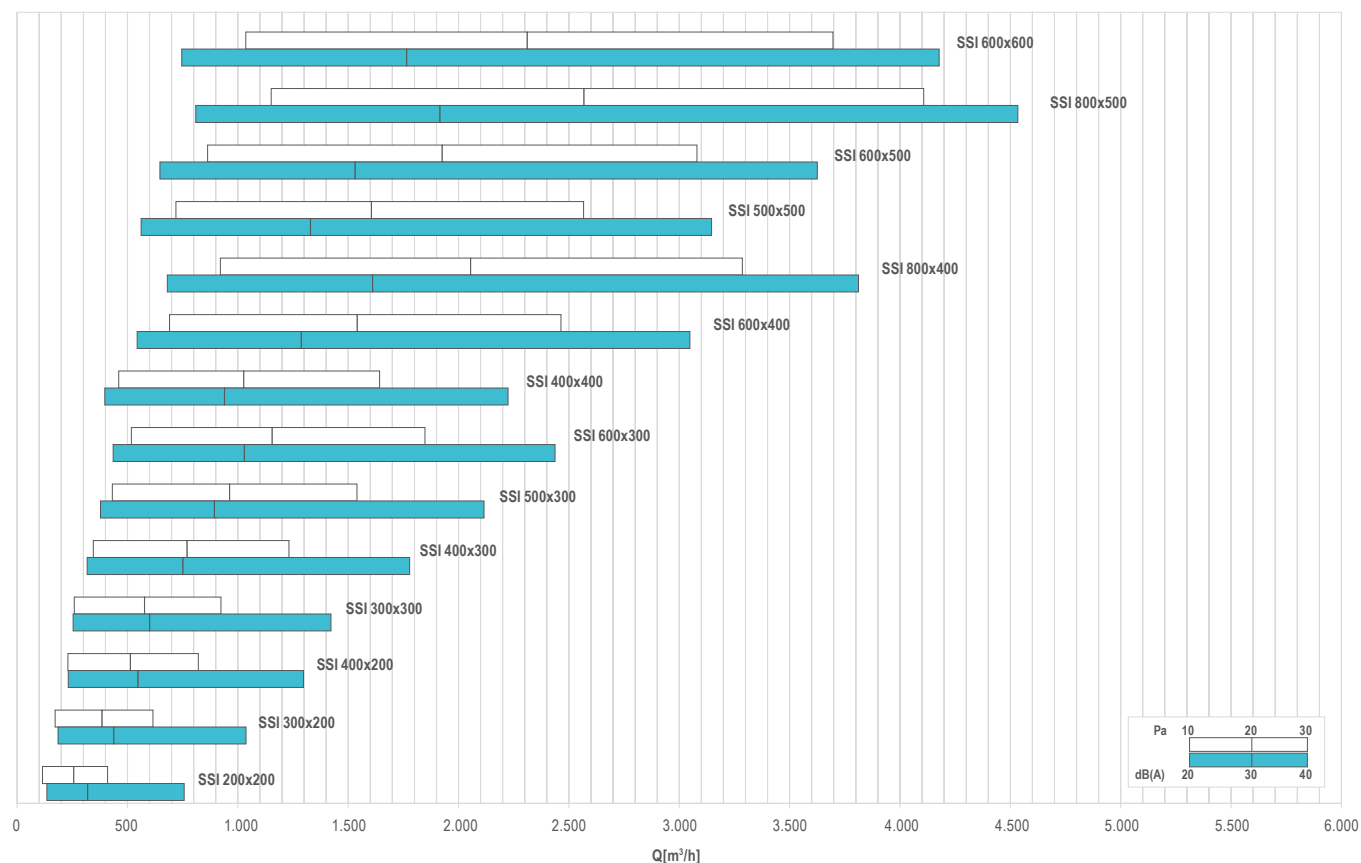


TABELLA DI SELEZIONE - SELECTION TABLE

Modello - Model	A _x [m²]	Q [m³/h]		L _{wa} [dB(A)]		Dp _t [Pa]	
		min	max	min	max	min	max
SSI 200x200	0,0364	50	260	-	28	5	20
SSI 400x200	0,0727	100	510	-	29	5	20
SSI 600x200	0,1091	150	770	-	30	5	20
SSI 800x200	0,1455	210	1030	-	31	5	20
SSI 1000x200	0,1818	260	1280	-	32	5	20
SSI 200x400	0,0727	100	510	-	29	5	20
SSI 400x400	0,1455	210	1030	-	31	5	20
SSI 600x400	0,2182	310	1540	-	32	5	20
SSI 800x400	0,2909	410	2060	-	33	5	20
SSI 1000x400	0,3636	520	2570	-	33	5	20
SSI 200x600	0,1091	150	770	-	30	5	20
SSI 400x600	0,2182	310	1540	-	32	5	20
SSI 600x600	0,3273	460	2310	-	33	5	20
SSI 800x600	0,4364	620	3080	-	34	5	20
SSI 1000x600	0,5455	770	3850	-	34	5	20
SSI 200x800	0,1455	210	1030	-	31	5	20
SSI 400x800	0,2909	410	2060	-	33	5	20
SSI 600x800	0,4364	620	3080	-	34	5	20
SSI 800x800	0,5818	830	4110	-	35	5	20
SSI 1000x800	0,7273	1030	5140	-	35	5	20
SSI 200x1000	0,1818	260	1280	-	32	5	20
SSI 400x1000	0,3636	520	2570	-	33	5	20
SSI 600x1000	0,5455	770	3850	-	34	5	20
SSI 800x1000	0,7273	1030	5140	-	35	5	20
SSI 1000x1000	0,9091	1290	6420	-	36	5	20