

UDM7



pairdirect
PREZZI - PRICES

		
BxH	UDM7	PDZI UDM7
mm	A	A
600x600	146,79	185,68
675x675	162,24	238,73

N.B.: Prezzi con filtro incluso - N.B.: Prices with filter included

CARATTERISTICHE:

Diffusori multidirezionali di mandata ad 1 feritoia e ripresa con filtro estraibile.

COSTRUZIONE:

Parte di mandata in alluminio e parte di ripresa in acciaio zincato il tutto verniciato RAL 9010.

IMPIEGO:

A controsoffitto modulare con funzione mandata e ripresa contemporanee.
Altezza di installazione 2,5-3,1 m.

FISSAGGIO:

Fissaggio a controsoffitto.

CHARACTERISTICS:

One slot supply and extraction multidirectional diffuser with removable filter.

CONSTRUCTION:

Supply part in aluminium and galvanized steel part of return all painted RAL 9010.


UTILIZATION:

For modular false-ceiling installation for contemporary air supply and return.
Installation height: 2,5-3,1m.



FIXING:

Fixing on false-ceiling.

DISEGNI - DRAWINGS

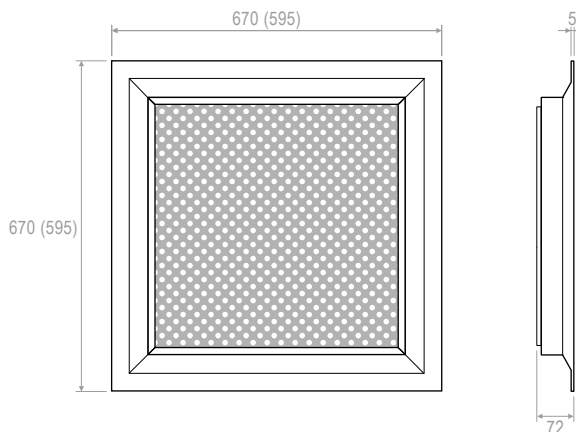

PLENUM

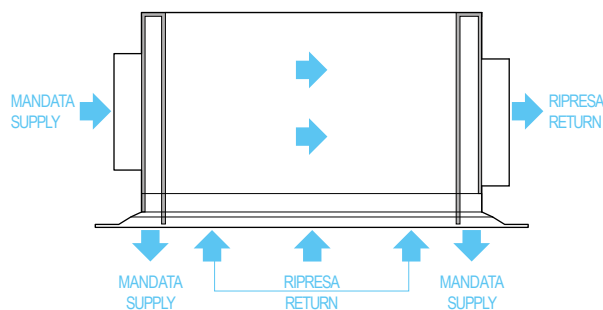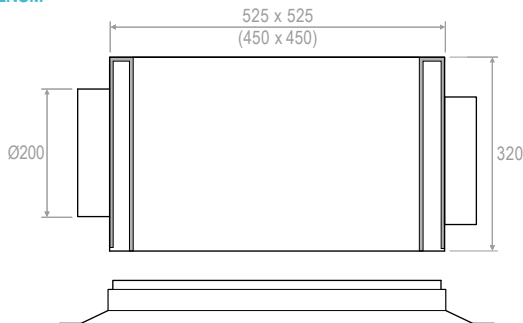

Modello - Model	A _k [m²]	No. Vie N. way	Q [m³/h]		L _{WA} [dB(A)]		X _{0,25} [m]		Dp _i [Pa]	
			min	max	min	max	min	max	min	max
UDM7 600x600	0,0480	4	470	1050	< 20	43	0,95	5,85	10	50
UDM7 675x675	0,0570	4	600	1320	< 20	43	1,13	6,24	10	50

DISEGNI - DRAWINGS

