



CHARACTERISTICS:
Volume control dampers 50 mm pitch.

CONSTRUCTION:
Galvanized steel frame.
Extruded aluminium blades.

DRIVE:
Counter rotating movement by train of gear wheels made of nylon, driven by manual control or servomotor.
Fixing:
By bolts on flanges corners.

ARTICLE DESCRIPTION:
SRC50P: opposed blade damper with pin for servo-motor (standard).
SRC50C: opposed blade damper with manual control.


↑ H mm	BASE B mm										
	200	250	300	350	400	450	500	550	600	650	700
	A	A	A	A	A	A	A	A	A	A	A
110	41,10	44,11	47,11	50,12	53,13	56,14	59,16	62,17	65,16	68,17	71,18
160	46,09	50,12	53,13	56,14	59,16	62,17	65,16	69,16	71,18	75,19	78,20
210	52,12	56,14	59,16	62,17	65,16	69,16	72,19	75,19	78,20	82,20	85,21
260	58,14	62,17	65,16	68,17	72,19	75,19	79,20	82,20	85,21	89,22	92,34
310	64,16	68,17	71,18	74,17	78,20	81,19	85,21	89,22	92,24	96,24	99,26
360	70,18	74,17	77,38	81,19	85,21	88,23	92,24	96,24	99,26	103,26	106,25
410	75,19	79,20	83,21	87,22	91,24	94,23	98,23	102,25	106,25	110,27	114,29
460	81,19	85,21	89,22	93,24	97,24	101,25	105,25	109,27	113,29	117,30	121,30
510	87,22	91,24	95,23	99,26	103,26	107,28	112,28	116,28	120,31	124,31	128,33
560	93,24	97,24	102,25	105,25	110,27	114,29	119,29	123,31	126,30	131,33	135,35
610	99,26	103,26	107,28	112,28	116,28	120,31	125,31	129,32	133,33	138,35	142,36
660	105,25	109,27	117,30	118,29	123,31	127,33	131,33	136,34	140,34	145,35	150,37
710	110,27	115,29	120,31	124,31	129,32	133,33	138,35	143,37	147,37	152,39	157,40

DESCRIPTION:
SRC50C: opposed blade damper with manual control.
SRC50P: opposed blade damper with pin for servo-motor (standard).

Let op: bovenstaande prijzen zijn in € bruto, excl. 21% BTW; vraag Paairdirect voor een netto aanbieding!



SELECTION TABLE

Model	A ₁ [m ²]	v [m/s]		Q [m ³ /h]		D _p (α=40°) [Pa]		L _{WA} (α=40°) [dB(A)]	
		min	max	min	max	min	max	min	max
SRC50 200x110	0,0220	3	6	240	480	31	125	38	55
SRC50 300x110	0,0330	3	6	360	710	31	125	39	57
SRC50 400x110	0,0440	3	6	480	950	31	125	41	58
SRC50 500x110	0,0550	3	6	590	1190	31	125	42	59
SRC50 600x110	0,0660	3	6	710	1430	31	125	42	60
SRC50 700x110	0,0770	3	6	830	1660	31	125	43	60
SR50 200x210	0,0420	3	6	450	910	31	125	40	58
SRC50 300x210 - 200x310	0,0630	3	6	680	1360	31	125	42	59
SRC50 400x210 - 200x410	0,0840	3	6	910	1810	31	125	43	61
SRC50 500x210 - 200x510	0,1050	3	6	1130	2270	31	125	44	62
SRC50 600x210 - 200x610	0,1260	3	6	1360	2720	31	125	45	62
SRC50 700x210 - 200x710	0,1470	3	6	1590	3180	31	125	46	63
SRC50 300x310	0,0930	3	6	1000	2010	31	125	44	61
SRC50 400x310 - 300x410	0,1240	3	6	1340	2680	31	125	45	62
SRC50 500x310 - 300x510	0,1550	3	6	1670	3350	31	125	46	63
SRC50 600x310 - 300x610	0,1860	3	6	2010	4020	31	125	47	64
SRC50 700x310 - 300x710	0,2170	3	6	2340	4690	31	125	48	65
SRC50 400x410	0,1640	3	6	1770	3540	31	125	46	63
SRC50 500x410 - 400x510	0,2050	3	6	2210	4430	31	125	47	64
SRC50 600x410 - 400x610	0,2460	3	6	2660	5310	31	125	48	65
SRC50 700x410 - 400x710	0,2870	3	6	3100	6200	31	125	49	66
SRC50 500x510	0,2550	3	6	2750	5510	31	125	48	65
SRC50 600x510 - 500x610	0,3060	3	6	3300	6610	31	125	49	66
SRC50 700x510 - 500x710	0,3570	3	6	3860	7710	31	125	50	67
SRC50 600x610	0,3660	3	6	3950	7910	31	125	50	67
SRC50 700x610 - 600x710	0,4270	3	6	4610	9220	31	125	50	68
SRC50 700x710	0,4970	3	6	5370	10740	31	125	51	68

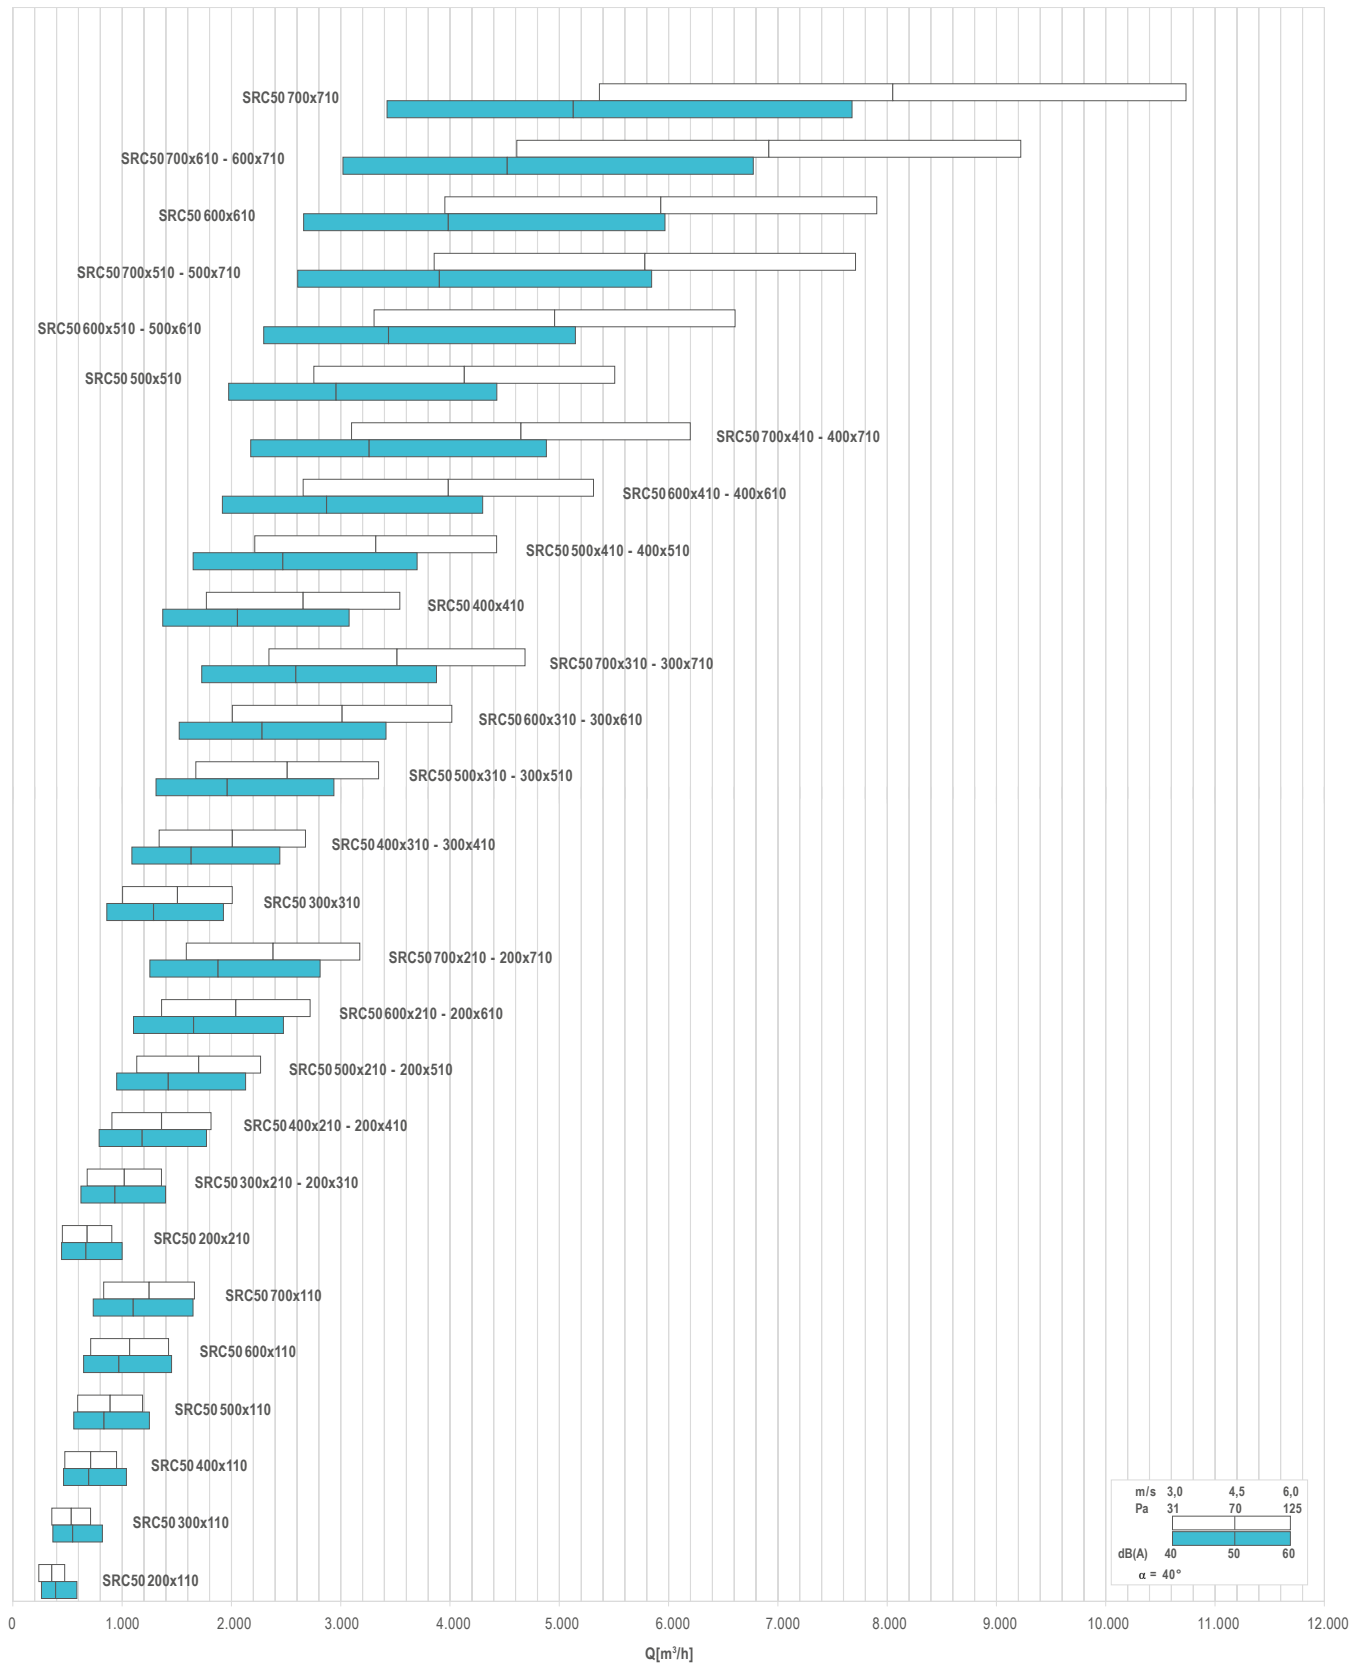

m/s	3,0	4,5	6,0
Pa	31	70	125
dB(A)	40	50	60
$\alpha = 40^\circ$			

DRAWINGS

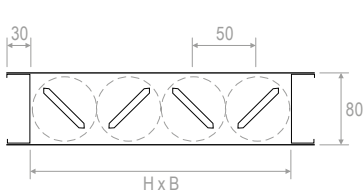

MANUAL CONTROL



Codice - Code: **CM20**
€ 11,24

