

CHARACTERISTICS:
Industrial return grilles grilles with fixed and 45° inclined bars 100mm pitch.

CONSTRUCTION:
Galvanized steel.
Models made of stainless steel AISI 304, 2B or BA finish, are available on demand.

UTILIZATION:
For wall installation and for external air intake or exhaust air flow.

FIXING:
Fixing by using frontal screws.

- ACCESSORIES:**
- Calibration damper made of galvanized steel and fins with opposite movement.
 - Mounting counterframes made of galvanized steel sheet.
 - Bird screen.
 - Overpressure damper.

						
BxH	GRI100	GRI100R	GRI100RZ	GRI100RSS	SC	CTP
mm	A	A	A	A	A	A




PAINTING:
Color RAL9010 - 9016: + 15%
Different colors: prices on request

DESCRIPTIONS:
GRI100: Steel return grille (100mm between bars)
GRI100R: Steel return grille (100 mm between bars) with bird mesh
GRI100RZ: Steel return grille (100 mm between bars) with insect screen
GRI100RSS: Steel return grille (100 mm between bars) with bird mesh and overpressure damper

AVAILABLE ON REQUEST:
- grille with rain-proof panel
+TEG+5% INCREASE



ACCESSORIES:
SC: Opposed blade damper
CTP: Counterframe in galvanised steel sheet profile section
PBZ: Connecting plenum

DRAWINGS

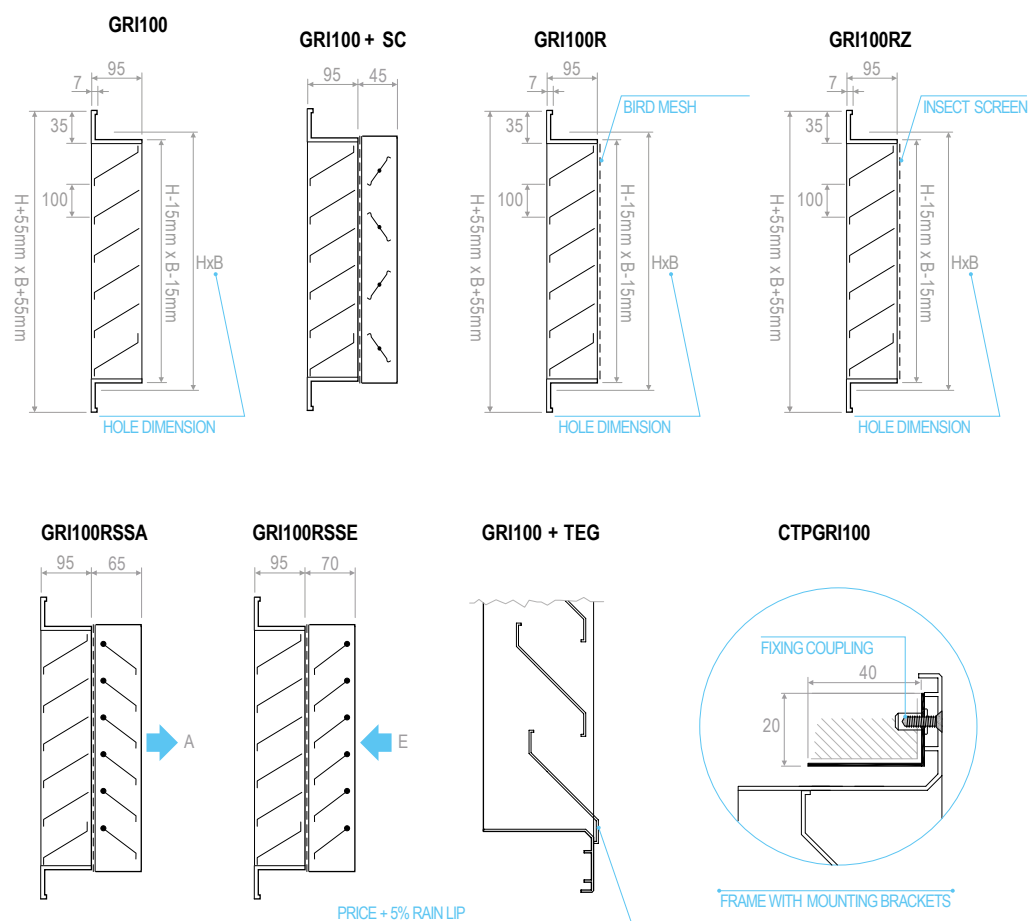




TYPE OF FIXING

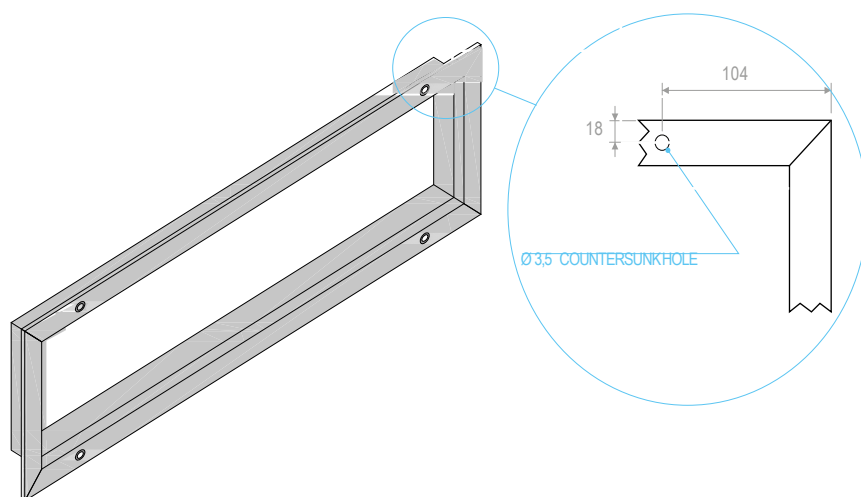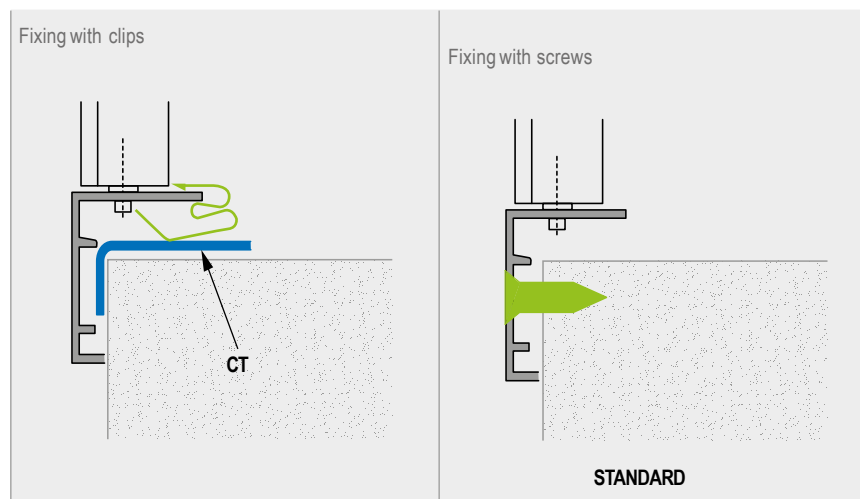

QUICK SELECTION DIAGRAM

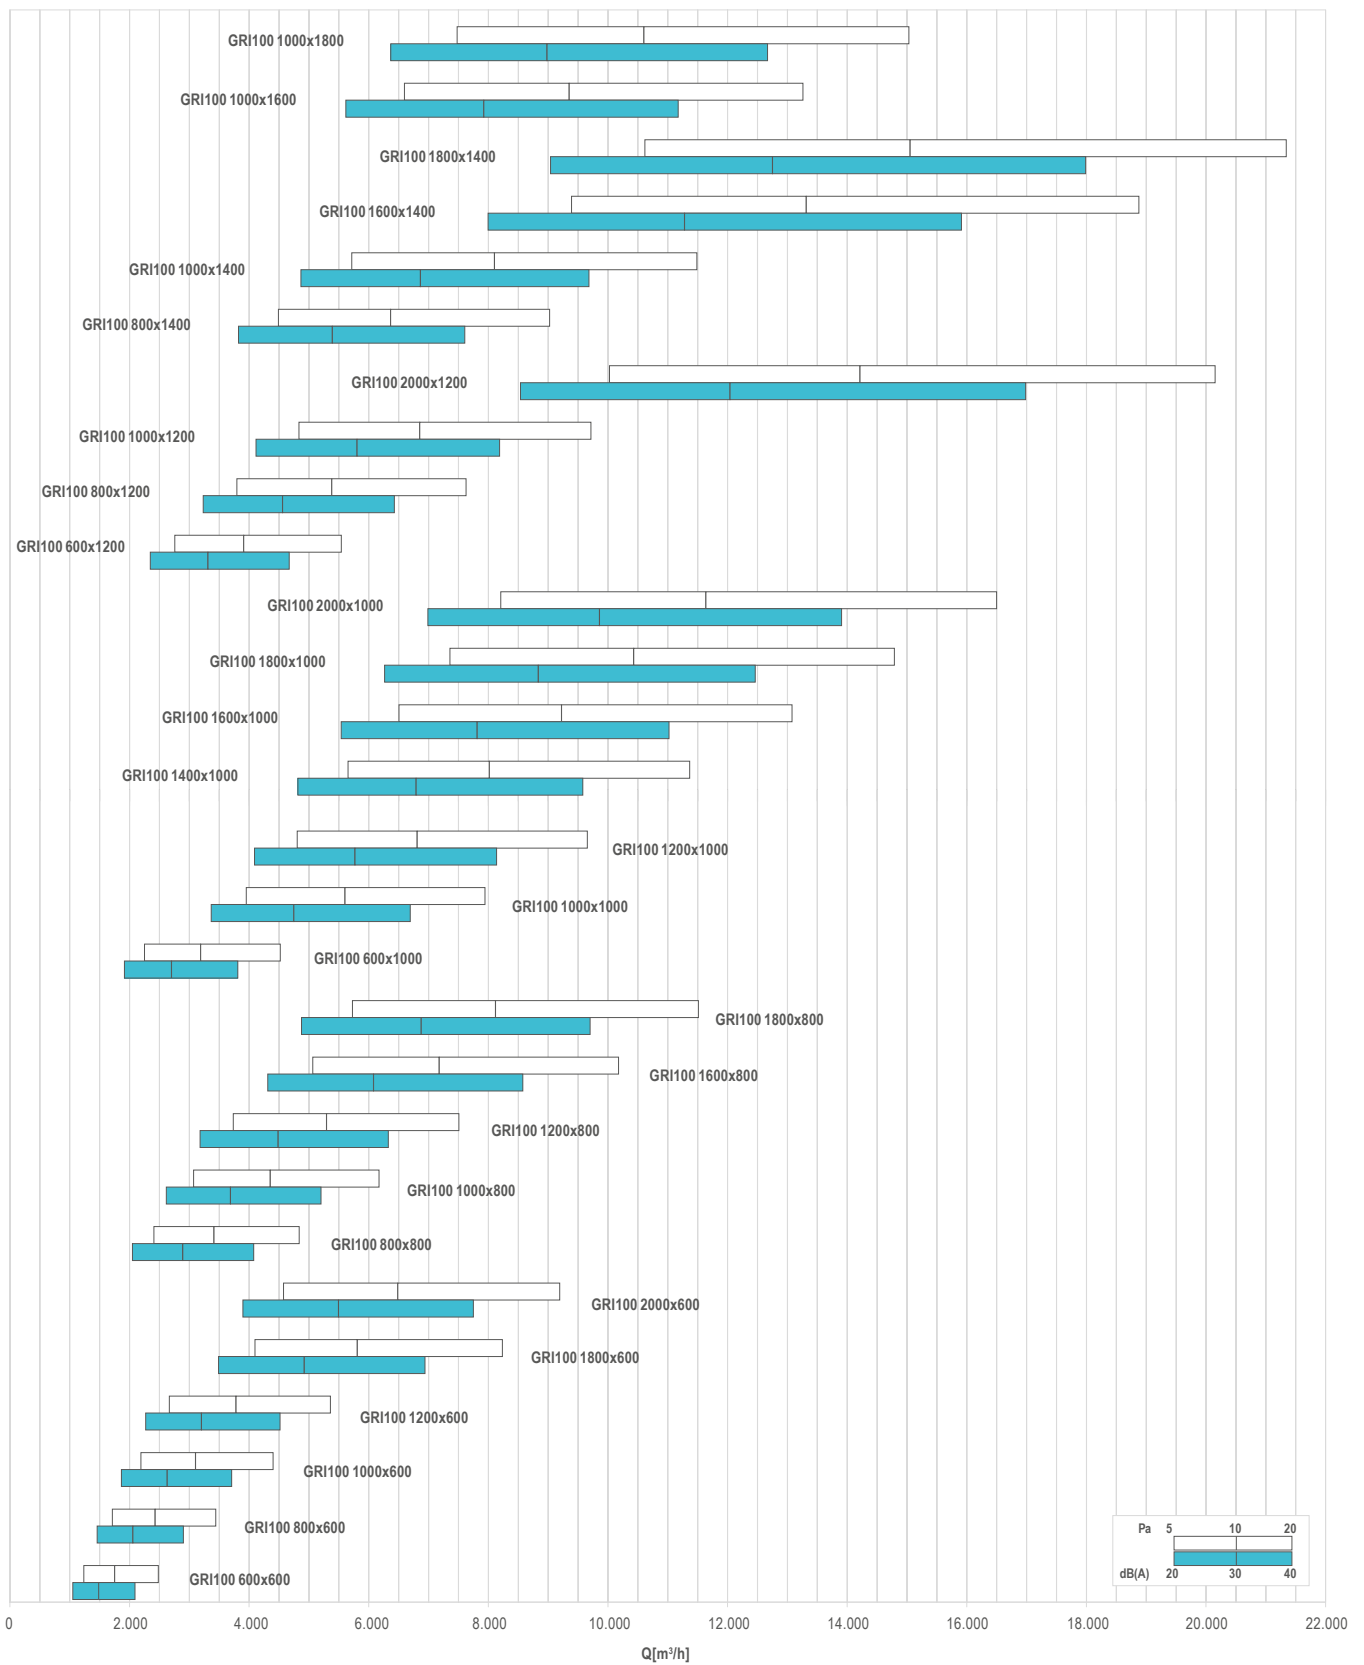

Modello - Model	A _k [m ²]	Q [m ³ /h]		L _{wa} [dB(A)]		Dp _t [Pa]	
		min	max	min	max	min	max
GRI100 600x600	0,1980	1240	2480	25	45	5	20
GRI100 800x600	0,2744	1710	3440	25	45	5	20
GRI100 1000x600	0,3509	2190	4400	25	45	5	20
GRI100 1200x600	0,4273	2670	5360	25	45	5	20
GRI100 1400x600	0,5037	3140	6320	25	45	5	20
GRI100 1600x600	0,5801	3620	7280	25	45	5	20
GRI100 1800x600	0,6565	4100	8240	25	45	5	20
GRI100 2000x600	0,7330	4570	9200	25	45	5	20
GRI100 600x800	0,2793	1740	3500	25	45	5	20
GRI100 800x800	0,3857	2410	4840	25	45	5	20
GRI100 1000x800	0,4921	3070	6170	25	45	5	20
GRI100 1200x800	0,5985	3740	7510	25	45	5	20
GRI100 1400x800	0,7049	4400	8840	25	45	5	20
GRI100 1600x800	0,8113	5060	10180	25	45	5	20
GRI100 1800x800	0,9177	5730	11510	25	45	5	20
GRI100 2000x800	1,0241	6390	12850	25	45	5	20
GRI100 600x1000	0,3605	2250	4520	25	45	5	20
GRI100 800x1000	0,4969	3100	6230	25	45	5	20
GRI100 1000x1000	0,6333	3950	7950	25	45	5	20
GRI100 1200x1000	0,7697	4800	9660	25	45	5	20
GRI100 1400x1000	0,9061	5660	11370	25	45	5	20
GRI100 1600x1000	1,0424	6510	13080	25	45	5	20
GRI100 1800x1000	1,1788	7360	14790	25	45	5	20
GRI100 2000x1000	1,3152	8210	16500	25	45	5	20
GRI100 600x1200	0,4418	2760	5540	25	45	5	20
GRI100 800x1200	0,6082	3800	7630	25	45	5	20
GRI100 1000x1200	0,7745	4830	9720	25	45	5	20
GRI100 1200x1200	0,9409	5870	11810	25	45	5	20
GRI100 1400x1200	1,1072	6910	13890	25	45	5	20
GRI100 1600x1200	1,2736	7950	15980	25	45	5	20
GRI100 1800x1200	1,4400	8990	18070	25	45	5	20
GRI100 2000x1200	1,6063	10030	20150	25	45	5	20
GRI100 600x1400	0,5231	3260	6560	25	45	5	20
GRI100 800x1400	0,7194	4490	9030	25	45	5	20
GRI100 1000x1400	0,9157	5720	11490	25	45	5	20
GRI100 1200x1400	1,1121	6940	13950	25	45	5	20
GRI100 1400x1400	1,3084	8170	16420	25	45	5	20
GRI100 1600x1400	1,5048	9390	18880	25	45	5	20
GRI100 1800x1400	1,7011	10620	21340	25	45	5	20
GRI100 2000x1400	1,8974	11840	23810	25	45	5	20
GRI100 600x1600	0,6043	3770	7580	25	45	5	20
GRI100 800x1600	0,8306	5180	10420	25	45	5	20
GRI100 1000x1600	1,0570	6600	13260	25	45	5	20
GRI100 1200x1600	1,2833	8010	16100	25	45	5	20
GRI100 1400x1600	1,5096	9420	18940	25	45	5	20
GRI100 1600x1600	1,7359	10830	21780	25	45	5	20
GRI100 1800x1600	1,9622	12250	24620	25	45	5	20
GRI100 2000x1600	2,1886	13660	27460	25	45	5	20
GRI100 600x1800	0,6856	4280	8600	25	45	5	20
GRI100 800x1800	0,9419	5880	11820	25	45	5	20
GRI100 1000x1800	1,1982	7480	15030	25	45	5	20
GRI100 1200x1800	1,4545	9080	18250	25	45	5	20
GRI100 1400x1800	1,7108	10680	21460	25	45	5	20
GRI100 1600x1800	1,9671	12280	24680	25	45	5	20
GRI100 1800x1800	2,2234	13880	27900	25	45	5	20
GRI100 2000x1800	2,4797	15480	31110	25	45	5	20
GRI100 2000x2000	2,7708	17290	34760	25	45	5	20