



CHARACTERISTICS:
Diffusers with adjustable micro nozzles arranged for circular duct.

CONSTRUCTION:
Material: steel plate, aluminium frame, white nylon nozzles.
Finish: White RAL 9010.

FIXING:
By using screws.

ACCESSORIES:
Calibration damper made of galvanized steel and fins with opposite movement.

	Condotto di installazione Duct			
BxH	Ø	Nr ugelli - Nr nozzles	GUC	SC
mm	mm		A	A
200x100	200/400	3	50,32	10,90
275x100		5	64,31	11,68
350x100		7	78,29	12,43
425x100		9	92,26	15,15
500x100		11	106,24	15,15
700x100		13	123,31	19,59
800x100		15	137,91	22,14
1000x100		19	167,11	27,04
1200x100	300/600	23	196,31	32,66
275x150		10	96,24	13,22
350x150		14	122,51	15,55
425x150		18	148,77	17,88
500x150		22	175,04	17,88
700x150		26	204,67	22,94
800x150		30	231,60	25,65
1000x150		38	285,48	30,59
1200x150	400/1000	46	339,36	34,62
275x200		15	131,57	17,12
350x200		21	170,12	18,66
425x200		27	208,68	21,78
500x200		33	247,24	21,78
700x200		39	289,42	27,61
800x200		45	328,70	30,35
1000x200		57	407,26	33,45
1200x200		69	485,83	36,55

Let op: bovenstaande prijzen zijn in € bruto, excl. 21% BTW; vraag Pairedirect voor een netto aanbieding!

DISEGNI - DRAWINGS

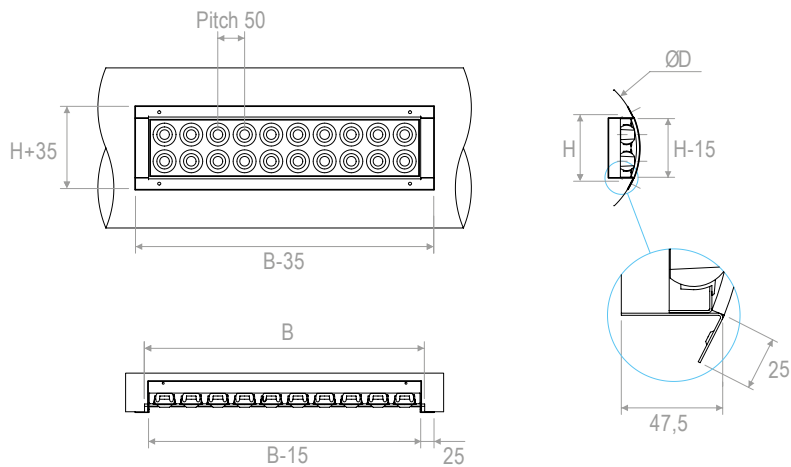


TABELLA DI SELEZIONE - SELECTION TABLE

Modello - Model	air flow	air flow	dB(A)	dB(A)	Throw	Throw	pa	pa
	min	max	min	max	m	m	min	max
200x100	5	25	21	29	1,7	6,7	5	55
275x100	10	40	21	29	1,7	6,7	5	55
350x100	15	55	21	29	1,7	6,7	5	55
425x100	20	70	21	29	1,7	6,7	5	55
500x100	25	85	21	29	1,7	6,7	5	55
700x100	30	100	21	29	1,7	6,7	5	55
800x100	35	115	21	29	1,7	6,7	5	55
1000x100	45	145	21	29	1,7	6,7	5	55
1200x100	55	175	21	29	1,7	6,7	5	55
275x150	25	75	23	32	1,9	6,9	5	55
350x150	30	110	23	32	1,9	6,9	5	55
425x150	40	140	23	32	1,9	6,9	5	55
500x150	50	170	23	32	1,9	6,9	5	55
700x150	60	200	23	32	1,9	6,9	5	55
800x150	70	230	23	32	1,9	6,9	5	55
1000x150	90	290	23	32	1,9	6,9	5	55
1200x150	105	355	23	32	1,9	6,9	5	55
275x200	35	115	25	34	2,1	7,3	5	55
350x200	50	160	25	34	2,1	7,3	5	55
425x200	60	205	25	34	2,1	7,3	5	55
500x200	75	255	25	34	2,1	7,3	5	55
700x200	90	300	25	34	2,1	7,3	5	55
800x200	105	345	25	34	2,1	7,3	5	55
1000x200	130	440	25	34	2,1	7,3	5	55
1200x200	160	530	25	34	2,1	7,3	5	55